

SOLAR PUMP


PROFESSIONAL SOLAR PUMP MANUFACTURER

Empower Your Life



Address: Room D, 10/F., Tower A, Billion Centre, 1 Wang Kwong Road, Kowloon HK
Email: info@glowtechpower.com

CONTROLLER

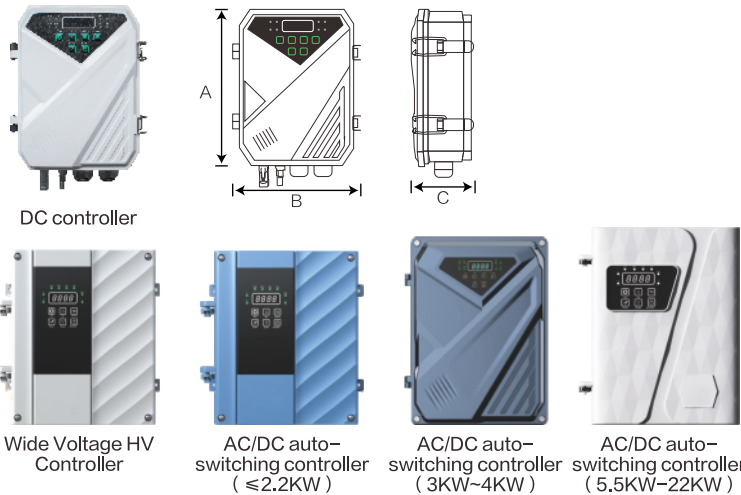

TECHNICAL DATA


Model	Dimensions (cm)			Weight(kg)
	A	B	C	
DC controller	21.5	18	8	1.5
Wide voltage HV controller	24	23	11	2.2
AC/DC auto-switching controller (≤2.2KW)	24	23	11	2.3
AC/DC auto-switching controller (3KW~4KW)	29	23	11	2.5
AC/DC auto-switching controller (5.5KW~22KW)	30.5	25.5	16	5.5

WORKING ENVIRONMENT AND ELECTRICAL PROPERTY

Controller and Pump Matching Method					
Controller Model	Adaptable Pump	Max.Input Current (A)	Max.Open Circuit Voltage (V)	Optimum MPPT Voltage(V)	Working Temperature (°C)
DF-12	Rated 12V Pump	17	<55	30~48	-15 ~ 60
DF-24	Rated 24V Pump	17	<55	30~48	-15 ~ 60
DF-36	Rated 36V Pump	17	<55	30~48	-15 ~ 60
DF-48	Rated 48V Pump	17	<105	60~90	-15 ~ 60
DF-72	Rated 72V Pump	17	<160	90~120	-15 ~ 60
DF-110	Rated 110V Pump	17	<210	110~150	-15 ~ 60
DF-72-A/D	Rated 72V-A/D Pump	17	<430	100~190	-15 ~ 60
DF-110-A/D	Rated 110V-A/D Pump	17	<430	110~190	-15 ~ 60
DF-150-A/D	Rated 150V-A/D Pump	17	<430	150~220	-15 ~ 60
DF-200-A/D	Rated 200V-A/D Pump	17	<430	200~290	-15 ~ 60
DF-300-A/D	Rated 300V-A/D Pump	17	<430	300~390	-15 ~ 60
DF-380-A/D	Rated 380V-A/D Pump	17~32	<780	520~750	-15 ~ 60
DF-110-HV	Rated 110V-HV Pump	17	<430	110~190	-15 ~ 60
DF-150-HV	Rated 150V-HV Pump	17	<430	150~220	-15 ~ 60
DF-200-HV	Rated 200V-HV Pump	17	<430	200~290	-15 ~ 60
DF-300-HV	Rated 300V-HV Pump	17	<430	300~390	-15 ~ 60

TIMER FOR SOLAR PUMP

Set the startup and shutdown time to intelligently control the operation of the solar pump. Can be matched with other factory's controllers.

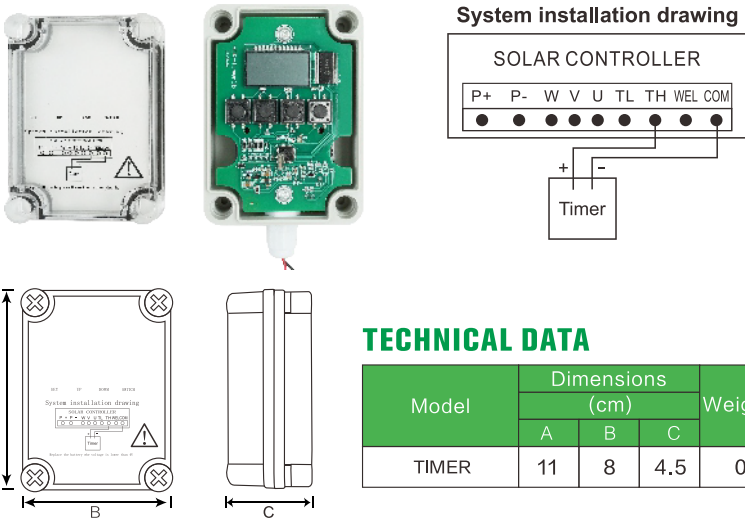


TECHNICAL DATA

Model	Dimensions (cm)			Weight(kg)
	A	B	C	
TIMER	11	8	4.5	0.25

DC SUBMERSIBLE PUMP

Environmental protection and energy saving

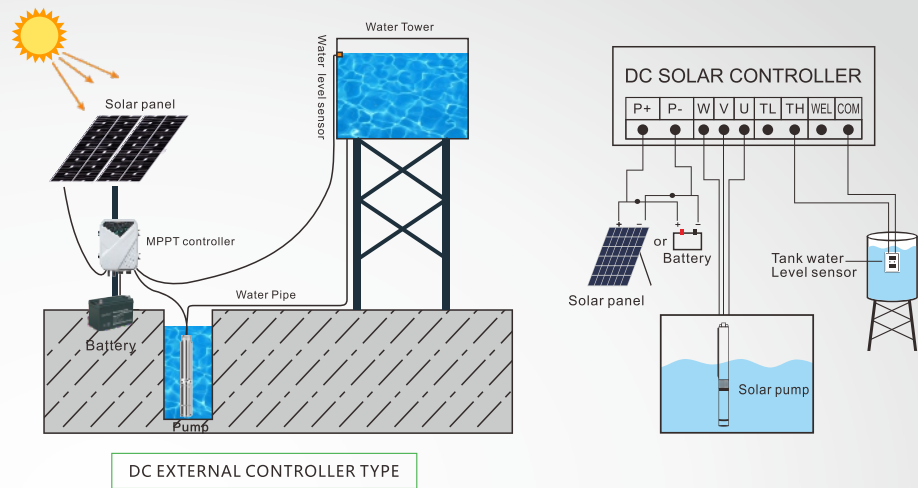

ADVANTAGE OF DC SOLAR PUMP

- 1、Permanent magnet DC brushless synchronous motor: The efficiency is increased by 15% – 20%, saving energy consumption.
- 2、The whole 304 stainless steel rotor shaft avoids the risk of shaft breakage.
- 3、Brass/Stainless steel outlet/connector/ oil cylinder, with better corrosion resistance.
- 4、Japanese NSK bearing, longer working life.
- 5、Double bearing structure at the bottom of rotor, using angular contact bearing, can withstand greater axial pressure.
- 6、Silicon carbide–impregnated graphite mechanical seal, long service life and reliable operation.
- 7、180℃ high temperature resistant copper wire, insulation class F.
- 8、Cold rolled 600 silicon steel sheet stator and rotor.
- 9、The magnet is made of 40SH NdFeb, with a temperature resistance of 150℃.
- 10、304 S/S pump shaft.
- 11、Controller:
 - (1)Waterproof grade: IP65
 - (2)Wide open circuit voltage range
 - (3)Ambient temperature: -15℃~60℃
 - (4)MPPT function, the solar power utilization rate is higher.
 - (5)LED displays the power, voltage, current, speed etc working condition.
 - (6)It can automatically adjust the speed for operation according to the sunlight power, and can also manually adjust the speed for operation according to the actual demand.
 - (7)Automatic startup and shutdown, without personnel on duty.
 - (8)Soft start: No impulse current, protect the pump motor.
 - (9)Over–voltage/undervoltage/over–current/phase loss/short circuit/water shortage/high temperature protection etc.
- 12、2 years warranty.

2DPC

2"DC BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER




DC controller

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
2DPC1.5–35–24–200	24V	30V–48V	200W	1.5m³/h	35m	0.75"	2m	<55V	≥1.3*PUMP POWER
2DPC1.7–45–24–300	24V	30V–48V	300W	1.7m³/h	45m	0.75"	2m	<55V	≥1.3*PUMP POWER
2DPC1.7–64–48–400	48V	60V–90V	400W	1.7m³/h	64m	0.75"	2m	<105V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

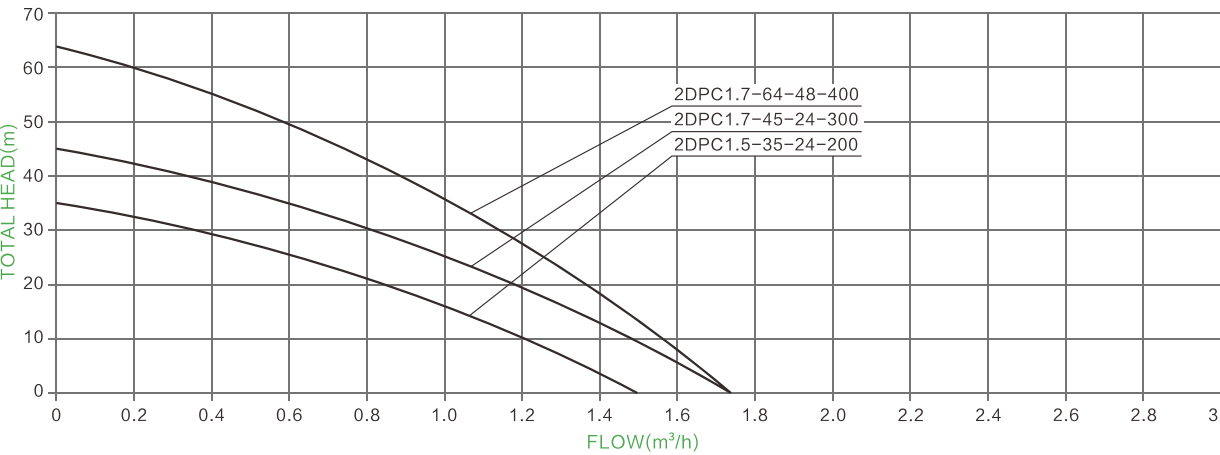

FREE SPARE PARTS



3DSS


3"DC BRUSHLESS SCREW SOLAR PUMP



TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
3DSS0.5-28-12-80	12V	30V-48V	80W	0.5m³/h	28m	0.75"	2m	<55V	≥ 1.3*PUMP POWER
3DSS1.2-56-24-120	24V	30V-48V	120W	1.2m³/h	56m	0.75"	2m	<55V	≥ 1.3*PUMP POWER
3DSS1.2- 77-36-210	36V	30V-48V	210W	1.2m³/h	77m	0.75"	2m	<55V	≥ 1.3*PUMP POWER
3DSS1.7-109-48-500	48V	60V-90V	500W	1.7m³/h	109m	0.75"	2m	<105V	≥ 1.3*PUMP POWER
3DSS2.0-150-48-750	48V	60V- 90V	750W	2.0m³/h	150m	0.75"	2m	<105V	≥ 1.3*PUMP POWER
3DSS2.0-150-72-750	72V	90V-120V	750W	2.0m³/h	150m	0.75"	2m	<160V	≥ 1.3*PUMP POWER

HYDRAULIC PERFORMAN CE CURVES

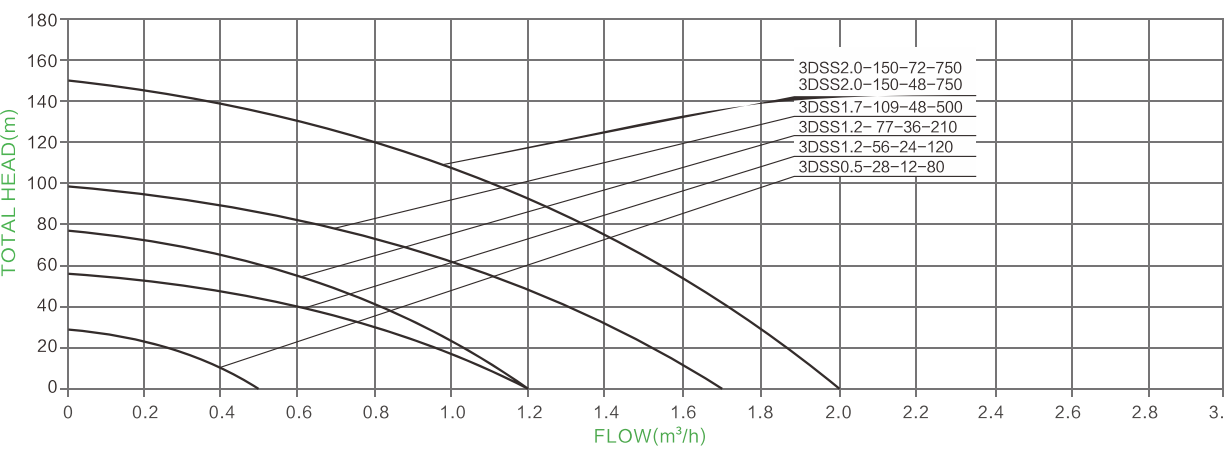

FREE SPARE PARTS



3DPC


3"DC BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER



TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
3DPC3-25-24-200	24V	30V-48V	200W	3.0m³/h	25m	1.25"	2m	<55V	≥ 1.3*PUMP POWER
3DPC3-35-24-300	24V	30V-48V	300W	3.0m³/h	35m	1.25"	2m	<55V	≥ 1.3*PUMP POWER
3DPC3.5-47-48-400	48V	60V-90V	400W	3.5m³/h	47m	1.25"	2m	<105V	≥ 1.3*PUMP POWER
3DPC3.5- 80-48-600	48V	60V-90V	600W	3.5m³/h	80m	1.25"	2m	<105V	≥ 1.3*PUMP POWER
3DPC3.5-80-72-600	72V	90V-120V	600W	3.5m³/h	80m	1.25"	2m	<160V	≥ 1.3*PUMP POWER
3DPC3.5-95-48-750	48V	60V-90V	750W	3.5m³/h	95m	1.25"	2m	<105V	≥ 1.3*PUMP POWER
3DPC3.5-95-72-750	72V	90V-120V	750W	3.5m³/h	95m	1.25"	2m	<160V	≥ 1.3*PUMP POWER
3DPC3.8-123-72-1100	72V	90V-120V	1100W	3.8m³/h	123m	1.25"	2m	<160V	≥ 1.3*PUMP POWER
3DPC3.8-123-110-1100	110V	110V-150V	1100W	3.8m³/h	123m	1.25"	2m	<210V	≥ 1.3*PUMP POWER
3DPC3.8-155-110-1300	110V	110V-150V	1300W	3.8m³/h	155m	1.25"	2m	<210V	≥ 1.3*PUMP POWER
3DPC3.8-180-110-1500	110V	110V-150V	1500W	3.8m³/h	180m	1.25"	2m	<210V	≥ 1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

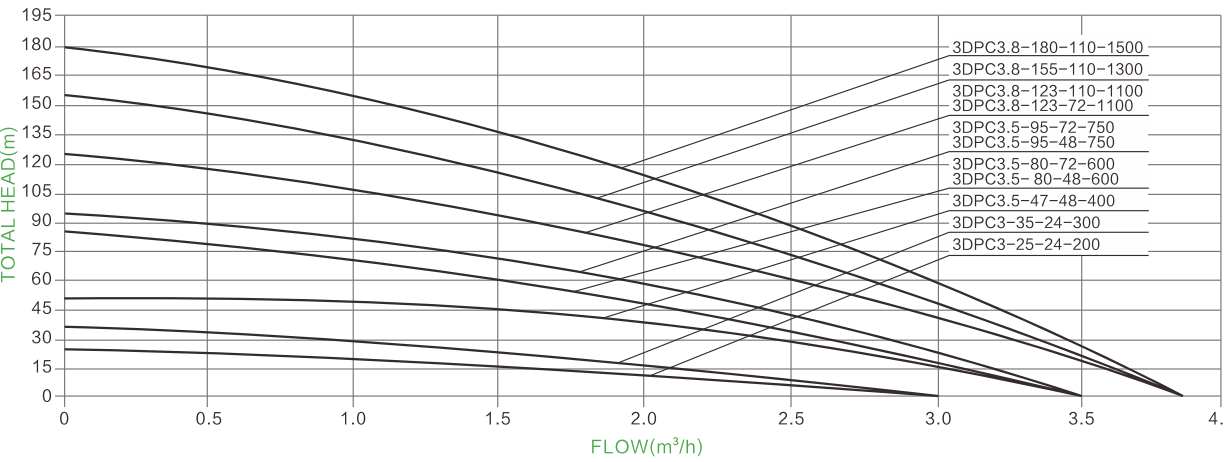

FREE SPARE PARTS




3DPC

3"DC BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER



Two designs for selection




DC controller

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
3DPC5-45-48-500	48V	60V-90V	500W	5m³/h	45m	1.5"	2m	<105V	≥1.3*PUMP POWER
3DPC5.2-50-48-600	48V	60V-90V	600W	5.2m³/h	50m	1.5"	2m	<105V	≥1.3*PUMP POWER
3DPC5.2-50-72-600	72V	90V-120V	600W	5.2m³/h	50m	1.5"	2m	<160V	≥1.3*PUMP POWER
3DPC5.2-75-110-750	110V	110V-150V	750W	5.2m³/h	75m	1.5"	2m	<210V	≥1.3*PUMP POWER
3DPC5.5-65-72-750	72V	90V-120V	750W	5.5m³/h	65m	1.5"	2m	<160V	≥1.3*PUMP POWER
3DPC5.5-65-110-750	110V	110V-150V	750W	5.5m³/h	65m	1.5"	2m	<210V	≥1.3*PUMP POWER
3DPC6-84-110-1100	110V	110V-150V	1100W	6m³/h	84m	1.5"	2m	<210V	≥1.3*PUMP POWER
3DPC6-125-110-1500	110V	110V-150V	1500W	6m³/h	125m	1.5"	2m	<210V	≥1.3*PUMP POWER
3DPC7-46-72-750	72V	90V-120V	750W	7m³/h	46m	1.5"	2m	<160V	≥1.3*PUMP POWER
3DPC7-46-110-750	110V	110V-150V	750W	7m³/h	46m	1.5"	2m	<210V	≥1.3*PUMP POWER
3DPC7.5-62-110-1100	110V	110V-150V	1100W	7.5m³/h	62m	1.5"	2m	<210V	≥1.3*PUMP POWER
3DPC7.5-78-110-1500	110V	110V-150V	1500W	7.5m³/h	78m	1.5"	2m	<210V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

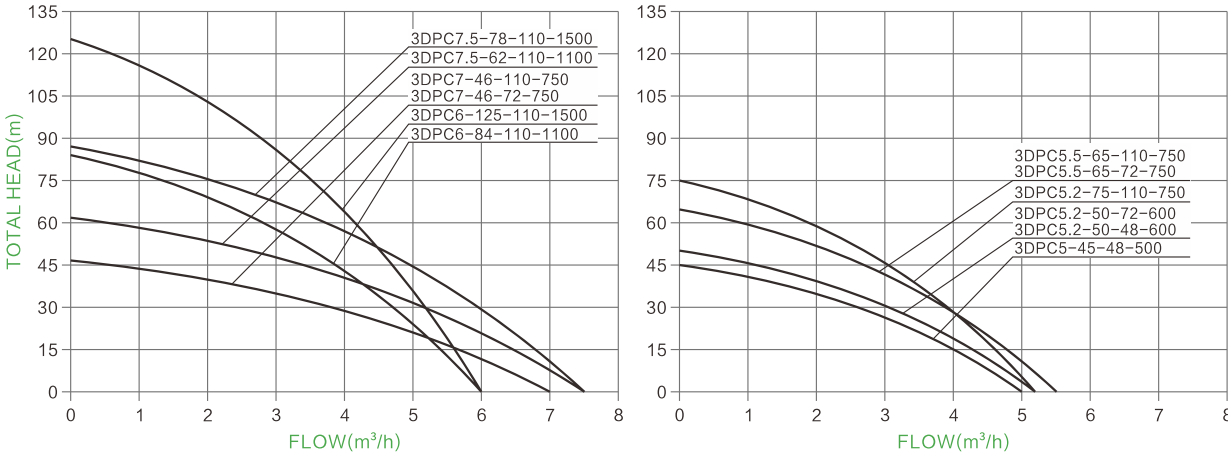

FREE SPARE PARTS



3DSC

3"DC BRUSHLESS SOLAR PUMP WITH S/S IMPELLER




DC controller

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
3DSC4-35-24-300	24V	30V-48V	300W	4m³/h	35m	1.25"	2m	<55V	≥1.3*PUMP POWER
3DSC4-50-48-400	48V	60V-90V	400W	4m³/h	50m	1.25"	2m	<105V	≥1.3*PUMP POWER
3DSC4-80-48-600	48V	60V-90V	600W	4m³/h	80m	1.25"	2m	<105V	≥1.3*PUMP POWER
3DSC4.8-95-72-750	72V	90V-120V	750W	4.8m³/h	95m	1.25"	2m	<160V	≥1.3*PUMP POWER
3DSC4.8-112-72-1100	72V	90V-120V	1100W	4.8m³/h	112m	1.25"	2m	<160V	≥1.3*PUMP POWER
3DSC4.8-112-110-1100	110V	110V-150V	1100W	4.8m³/h	112m	1.25"	2m	<210V	≥1.3*PUMP POWER
3DSC4.8-135-110-1500	110V	110V-150V	1500W	4.8m³/h	135m	1.25"	2m	<210V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

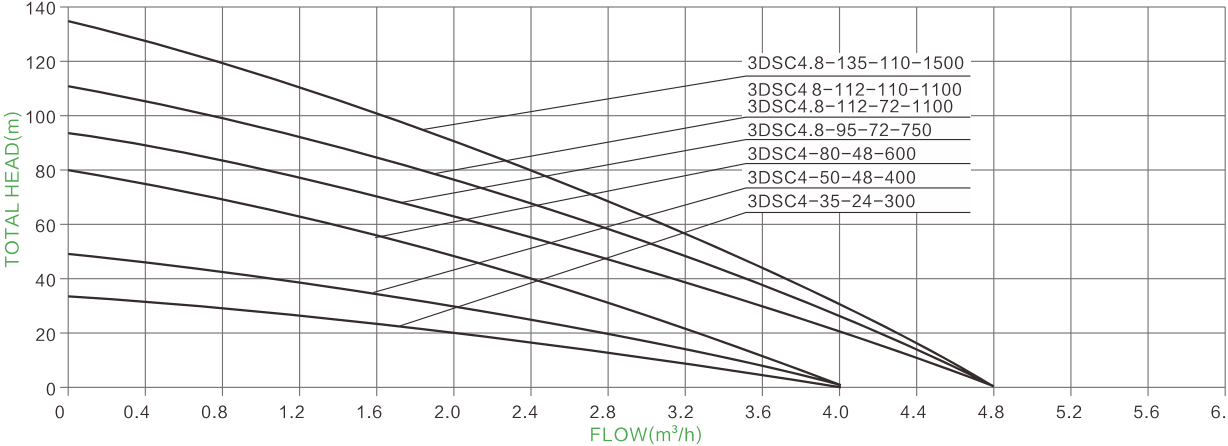

FREE SPARE PARTS




4" DC BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER



TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DPC6-42-48-600	48V	60V-90V	600W	6.0m³/h	42m	1.25"	2m	<105V	≥1.3*PUMP POWER
4DPC6-42-72-600	72V	90V-120V	600W	6.0m³/h	42m	1.25"	2m	<160V	≥1.3*PUMP POWER
4DPC6-56-48-750	48V	60V-90V	750W	6.0m³/h	56m	1.25"	2m	<105V	≥1.3*PUMP POWER
4DPC6-56-72-750	72V	90V-120V	750W	6.0m³/h	56m	1.25"	2m	<160V	≥1.3*PUMP POWER
4DPC6-84-72-1100	72V	90V-120V	1100W	6.0m³/h	84m	1.25"	2m	<160V	≥1.3*PUMP POWER
4DPC6-84-110-1100	110V	110V-150V	1100W	6.0m³/h	84m	1.25"	2m	<210V	≥1.3*PUMP POWER
4DPC6-112-110-1300	110V	110V-150V	1300W	6.0m³/h	112m	1.25"	2m	<210V	≥1.3*PUMP POWER
4DPC6-135-110-1500	110V	110V-150V	1500W	6.0m³/h	135m	1.25"	2m	<210V	≥1.3*PUMP POWER


HYDRAULIC PERFORMANCE CURVES

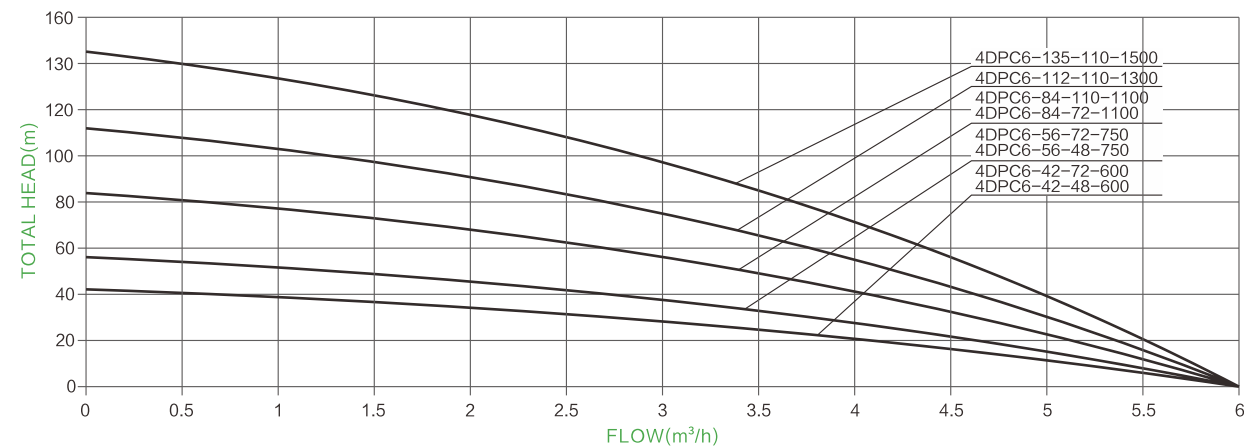

FREE SPARE PARTS




4"DC BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER

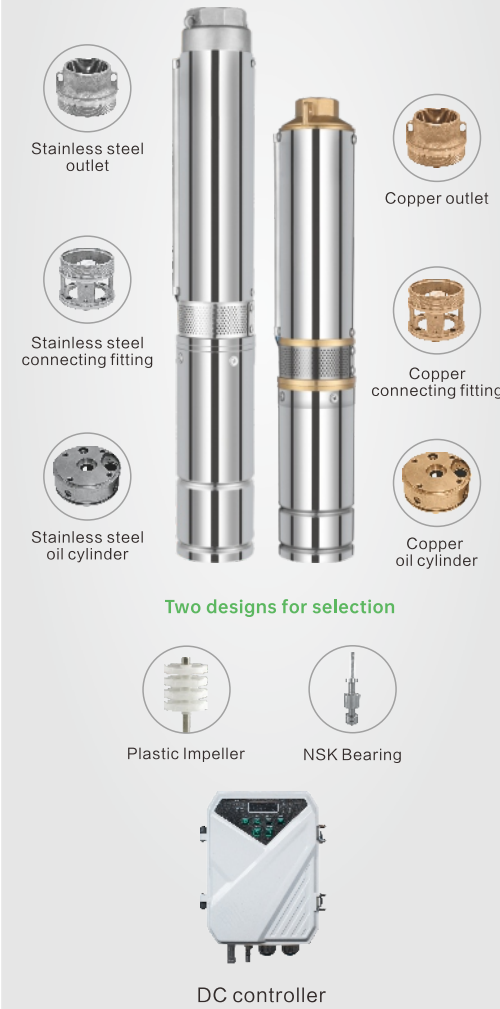

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DPC9-45-110-750	110V	110V-150V	750W	9.0m³/h	45m	2"	2m	<210V	≥1.3*PUMP POWER
4DPC9-58-110-1100	110V	110V-150V	1100W	9.0m³/h	58m	2"	2m	<210V	≥1.3*PUMP POWER
4DPC9-71-110-1300	110V	110V-150V	1300W	9.0m³/h	71m	2"	2m	<210V	≥1.3*PUMP POWER
4DPC9-85-110-1500	110V	110V-150V	1500W	9.0m³/h	85m	2"	2m	<210V	≥1.3*PUMP POWER
4DPC13-36-110-750	110V	110V-150V	750W	13.0m³/h	36m	2"	2m	<210V	≥1.3*PUMP POWER
4DPC13-49-110-1100	110V	110V-150V	1100W	13.0m³/h	49m	2"	2m	<210V	≥1.3*PUMP POWER
4DPC13-54-110-1300	110V	110V-150V	1300W	13.0m³/h	54m	2"	2m	<210V	≥1.3*PUMP POWER
4DPC13-60-110-1500	110V	110V-150V	1500W	13.0m³/h	60m	2"	2m	<210V	≥1.3*PUMP POWER
4DPC17-48-110-1500	110V	110V-150V	1500W	17.0m³/h	48m	2"	2m	<210V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

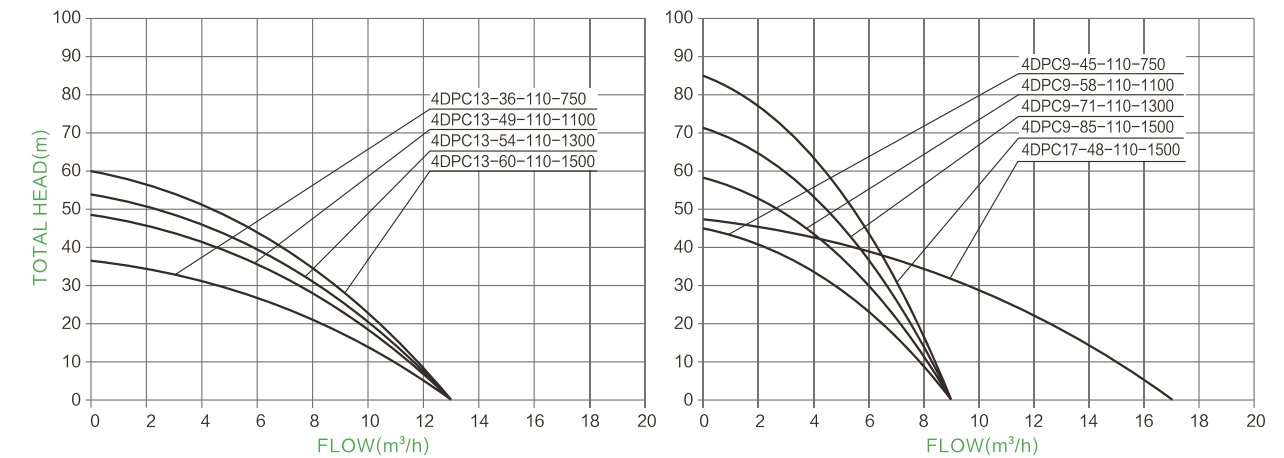


FREE SPARE PARTS



4DLR


4"DC BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER

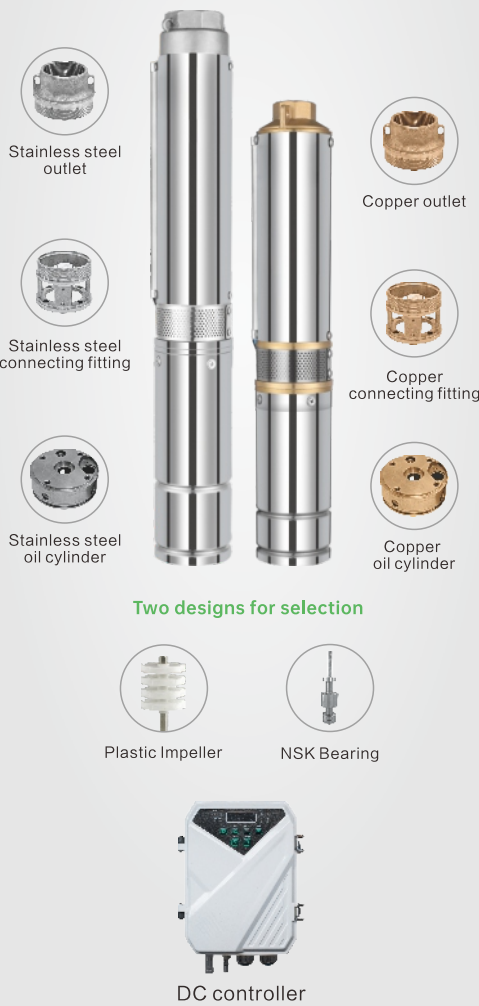

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DLR5-85-110-750	110V	110V-150V	750W	5m³/h	85m	1.25"	2m	<210V	≥1.3*PUMP POWER
4DLR6-65-72-550	72V	90V-120V	550W	6m³/h	65m	1.25"	2m	<160V	≥1.3*PUMP POWER
4DLR7.5-65-110-750	110V	110V-150V	750W	7.5m³/h	65m	2"	2m	<210V	≥1.3*PUMP POWER
4DLR7.5-100-72-1100	72V	90V-120V	1100W	7.5m³/h	100m	2"	2m	<160V	≥1.3*PUMP POWER
4DLR7.5-110-110-1500	110V	110V-150V	1500W	7.5m³/h	110m	2"	2m	<210V	≥1.3*PUMP POWER
4DLR11-45-72-550	72V	90V-120V	550W	11m³/h	45m	2"	2m	<160V	≥1.3*PUMP POWER
4DLR12-75-72-1100	72V	90V-120V	1100W	12m³/h	75m	2"	2m	<160V	≥1.3*PUMP POWER
4DLR11.5-100-110-1500	110V	110V-150V	1500W	11.5m³/h	100m	2"	2m	<210V	≥1.3*PUMP POWER
4DLR14.5-45-110-750	110V	110V-150V	750W	14.5m³/h	45m	2"	2m	<210V	≥1.3*PUMP POWER
4DLR15-55-72-1100	72V	90V-120V	1100W	15m³/h	55m	2"	2m	<160V	≥1.3*PUMP POWER
4DLR15.5-65-110-1500	110V	110V-150V	1500W	15.5m³/h	65m	2"	2m	<210V	≥1.3*PUMP POWER
4DLR20-38-110-1500	110V	110V-150V	1500W	20m³/h	38m	2"	2m	<210V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

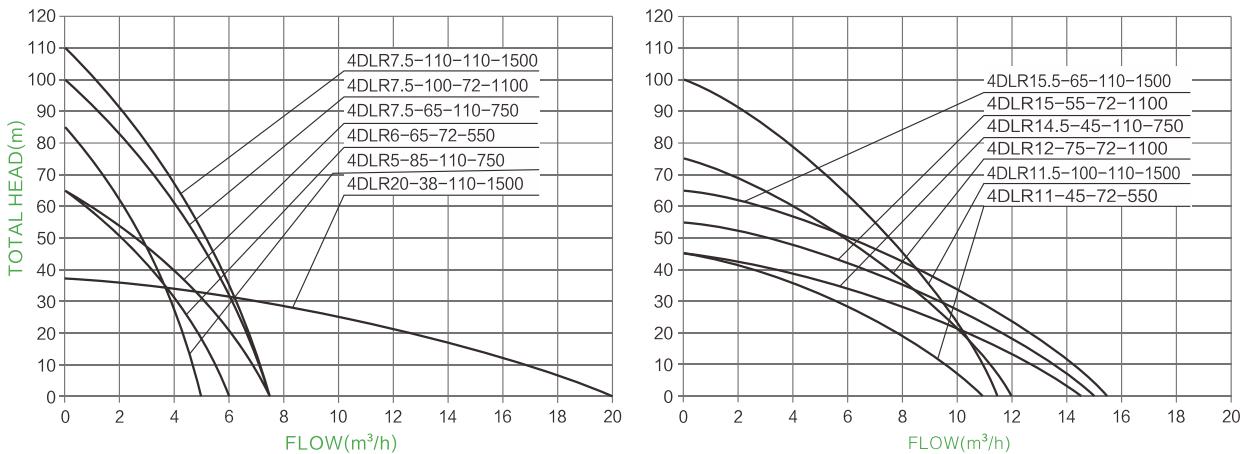

FREE SPARE PARTS



4DSC


4"DC BRUSHLESS SOLAR PUMP WITH S/S IMPELLER



TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DSC5.2-45-48-500	48V	60V-90V	500W	5.2m³/h	45m	1.25"	2m	<105V	≥1.3*PUMP POWER
4DSC5.2-67-48-750	48V	60V-90V	750W	5.2m³/h	67m	1.25"	2m	<105V	≥1.3*PUMP POWER
4DSC5.2-67-72-750	72V	90V-120V	750W	5.2m³/h	67m	1.25"	2m	<160V	≥1.3*PUMP POWER
4DSC5.2-101-72-1100	72V	90V-120V	1100W	5.2m³/h	101m	1.25"	2m	<160V	≥1.3*PUMP POWER
4DSC5.2-101-110-1100	110V	110V-150V	1100W	5.2m³/h	101m	1.25"	2m	<210V	≥1.3*PUMP POWER
4DSC5.2-146-110-1300	110V	110V-150V	1300W	5.2m³/h	146m	1.25"	2m	<210V	≥1.3*PUMP POWER
4DSC4.8-203-110-1500	110V	110V-150V	1500W	4.8m³/h	203m	1.25"	2m	<210V	≥1.3*PUMP POWER
4DSC7.5-80-110-1300	110V	110V-150V	1300W	7.5m³/h	80m	1.25"	2m	<210V	≥1.3*PUMP POWER
4DSC7.5-100-110-1500	110V	110V-150V	1500W	7.5m³/h	100m	1.25"	2m	<210V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

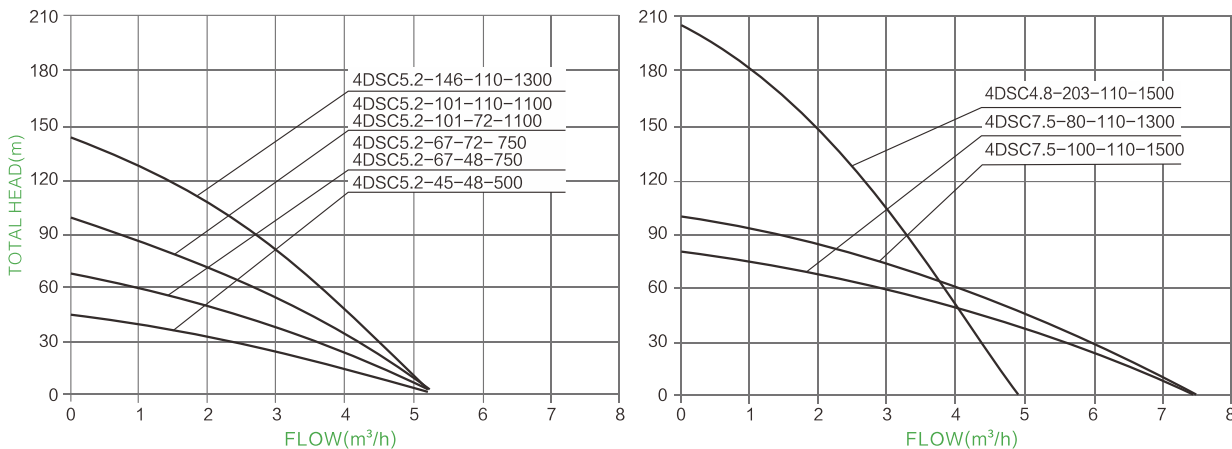

FREE SPARE PARTS




4DSC/4/6DSC
4" /6" DC BRUSHLESS SOLAR PUMP WITH
S/S IMPELLER



TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DSC11-60-110-1500	110V	110V-150V	1500W	11m³/h	60m	2"	2m	<210V	≥ 1.3*PUMP POWER
4DSC19-35-110-1500	110V	110V-150V	1500W	19m³/h	35m	2"	2m	<210V	≥ 1.3*PUMP POWER
4DSC25-26-110-1500	110V	110V-150V	1500W	25m³/h	26m	2"	2m	<210V	≥ 1.3*PUMP POWER
4/6DSC30-19-72-1100	72V	90V-120V	1100W	30m³/h	19m	3"	2m	<160V	≥ 1.3*PUMP POWER
4/6DSC36-22-110-1500	110V	110V-150V	1500W	36m³/h	22m	3"	2m	<210V	≥ 1.3*PUMP POWER
4/6DSC30-31-110-1500	110V	110V-150V	1500W	30m³/h	31m	3"	2m	<210V	≥ 1.3*PUMP POWER


HYDRAULIC PERFORMANCE CURVES

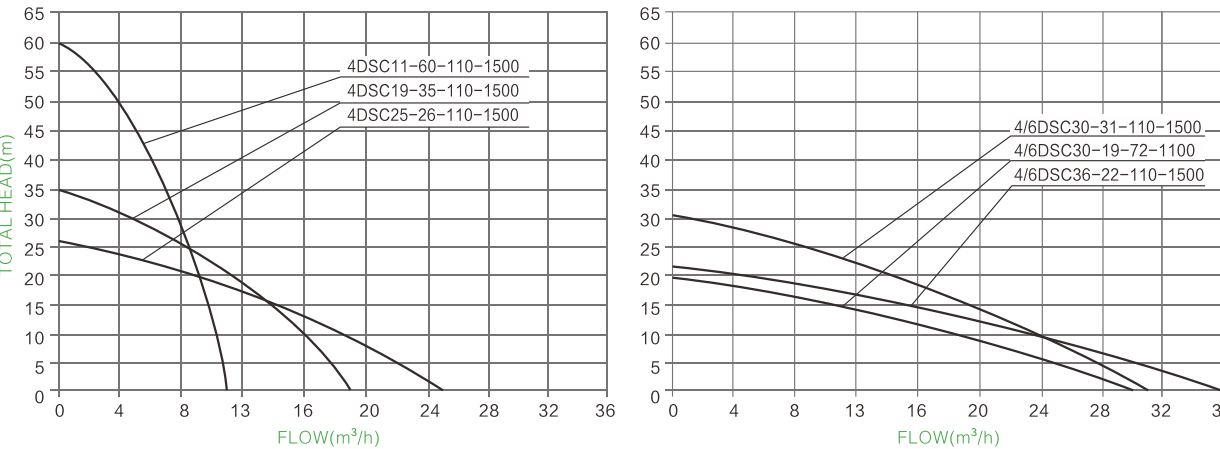




FREE SPARE PARTS



AC/DC HYBRID & WIDE VOLTAGE
SUBMERSIBLE PUMP

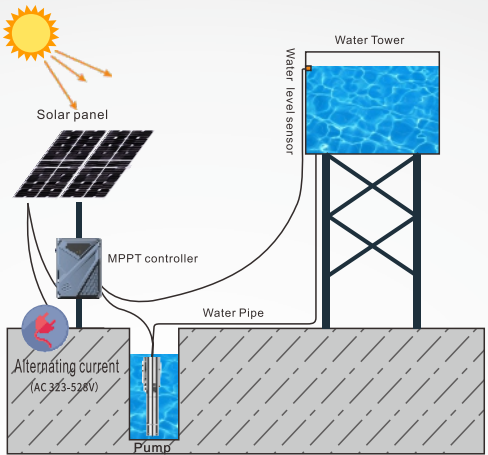

AC/DC EXTERNAL CONTROLLER TYPE

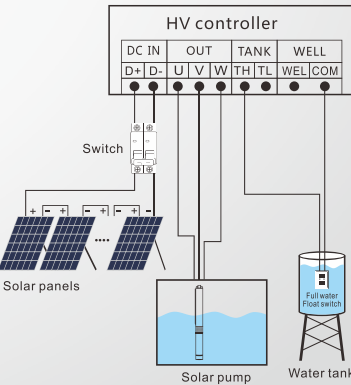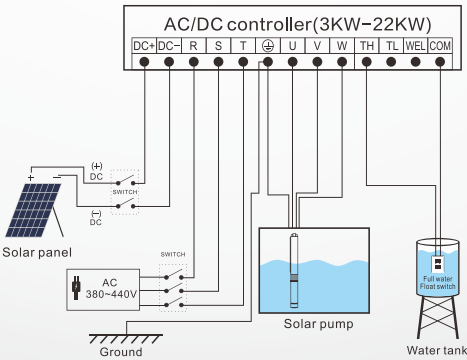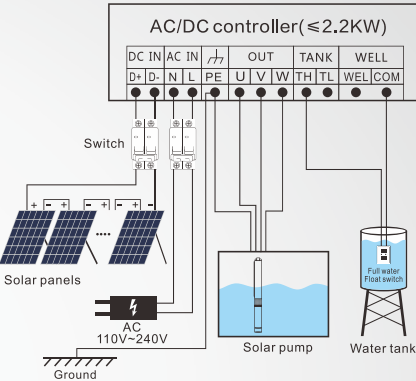


3DPC-A/D
3DPC-HV

3" AC/DC & WIDE VOLTAGE BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER




Two designs for selection



TECHNICAL DATA

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
3DPC3.5-95-110-750-A/D 3DPC3.5-95-110-750-HV	85V-280V /	80V-430V	750W	3.5m³/h	95m	1.25"	2m	<430V	≥1.3*PUMP POWER
3DPC3.8-123-150-1100-A/D 3DPC3.8-123-150-1100-HV	85V-280V /	80V-430V	1100W	3.8m³/h	123m	1.25"	2m	<430V	≥1.3*PUMP POWER
3DPC3.8-155-150-1300-A/D 3DPC3.8-155-150-1300-HV	85V-280V /	80V-430V	1300W	3.8m³/h	155m	1.25"	2m	<430V	≥1.3*PUMP POWER
3DPC3.8-180-200-1500-A/D 3DPC3.8-180-200-1500-HV	85V-280V /	80V-430V	1500W	3.8m³/h	180m	1.25"	2m	<430V	≥1.3*PUMP POWER
3DPC5.2-75-110-750-A/D 3DPC5.2-75-110-750-HV	85V-280V /	80V-430V	750W	5.2m³/h	75m	1.5"	2m	<430V	≥1.3*PUMP POWER
3DPC5.5-65-110-750-A/D 3DPC5.5-65-110-750-HV	85V-280V /	80V-430V	750W	5.5m³/h	65m	1.5"	2m	<430V	≥1.3*PUMP POWER
3DPC6-84-150-1100-A/D 3DPC6-84-150-1100-HV	85V-280V /	80V-430V	1100W	6m³/h	84m	1.5"	2m	<430V	≥1.3*PUMP POWER
3DPC6-125-200-1500-A/D 3DPC6-125-200-1500-HV	85V-280V /	80V-430V	1500W	6m³/h	125m	1.5"	2m	<430V	≥1.3*PUMP POWER
3DPC7-46-110-750-A/D 3DPC7-46-110-750-HV	85V-280V /	80V-430V	750W	7m³/h	46m	1.5"	2m	<430V	≥1.3*PUMP POWER
3DPC7.5-62-150-1100-A/D 3DPC7.5-62-150-1100-HV	85V-280V /	80V-430V	1100W	7.5m³/h	62m	1.5"	2m	<430V	≥1.3*PUMP POWER
3DPC7.5-78-200-1500-A/D 3DPC7.5-78-200-1500-HV	85V-280V /	80V-430V	1500W	7.5m³/h	78m	1.5"	2m	<430V	≥1.3*PUMP POWER

PERFORMANCE CURVES

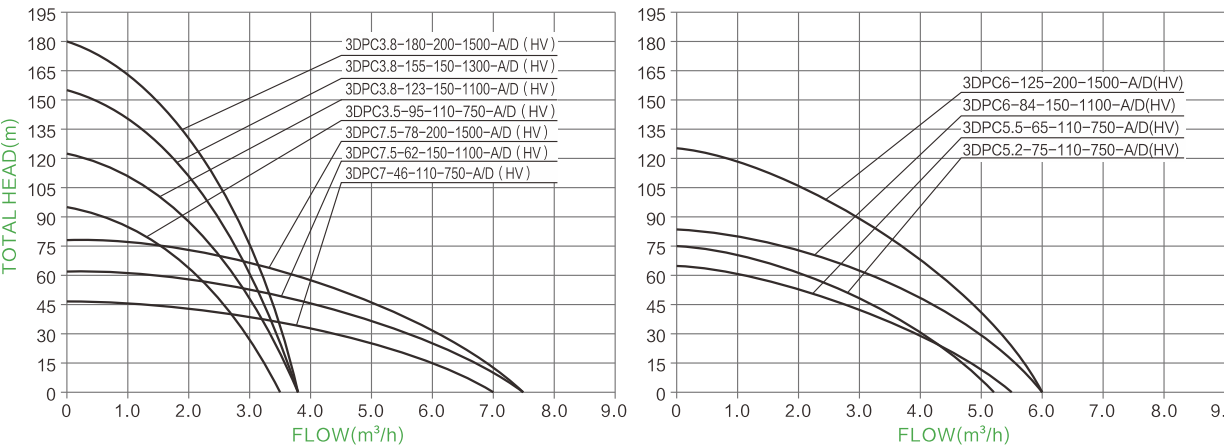

FREE SPARE PARTS



3DSC-A/D
3DSC-HV


3" AC/DC & WIDE VOLTAGE BRUSHLESS SOLAR PUMP WITH S/S IMPELLER



TECHNICAL DATA

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
3DSC4.8-95-110-750-A/D 3DSC4.8-95-110-750-HV	85V-280V /	80V-430V	750W	4.8m³/h	95m	1.25"	2m	<430V	≥1.3*PUMP POWER
3DSC4.8-110-150-1100-A/D 3DSC4.8-110-150-1100-HV	85V-280V /	80V-430V	1100W	4.8m³/h	110m	1.25"	2m	<430V	≥1.3*PUMP POWER
3DSC4.8-130-200-1500-A/D 3DSC4.8-130-200-1500-HV	85V-280V /	80V-430V	1500W	4.8m³/h	130m	1.25"	2m	<430V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

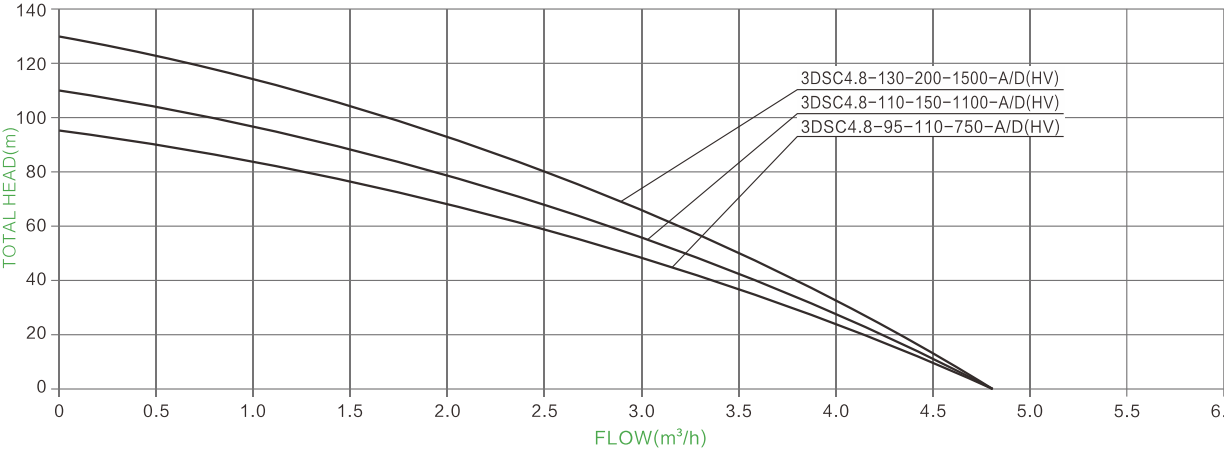


FREE SPARE PARTS



4DPC-A/D
4DPC-HV

4" AC/DC & WIDE VOLTAGE BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER

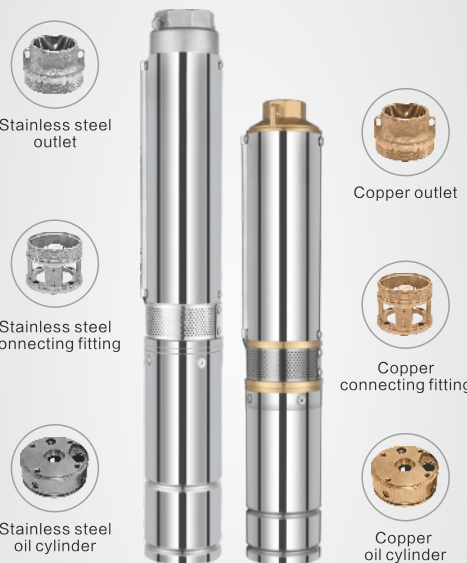

Two designs for selection




AC/DC auto-switching controller (≤2.2KW)

Wide Voltage HV Controller

TECHNICAL DATA

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DPC6-56-110-750-A/D 4DPC6-56-110-750-HV	85V-280V /	80V-430V	750W	6m³/h	56m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DPC6-84-150-1100-A/D 4DPC6-84-150-1100-HV	85V-280V /	80V-430V	1100W	6m³/h	84m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DPC6-112-150-1300-A/D 4DPC6-112-150-1300-HV	85V-280V /	80V-430V	1300W	6m³/h	112m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DPC6-135-200-1500-A/D 4DPC6-135-200-1500-HV	85V-280V /	80V-430V	1500W	6m³/h	135m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DPC9-45-110-750-A/D 4DPC9-45-110-750-HV	85V-280V /	80V-430V	750W	9m³/h	45m	2"	2m	<430V	≥1.3*PUMP POWER
4DPC9-58-150-1100-A/D 4DPC9-58-150-1100-HV	85V-280V /	80V-430V	1100W	9m³/h	58m	2"	2m	<430V	≥1.3*PUMP POWER
4DPC9-71-150-1300-A/D 4DPC9-71-150-1300-HV	85V-280V /	80V-430V	1300W	9m³/h	71m	2"	2m	<430V	≥1.3*PUMP POWER
4DPC9-85-200-1500-A/D 4DPC9-85-200-1500-HV	85V-280V /	80V-430V	1500W	9m³/h	85m	2"	2m	<430V	≥1.3*PUMP POWER
4DPC13-36-110-750-A/D 4DPC13-36-110-750-HV	85V-280V /	80V-430V	750W	13m³/h	36m	2"	2m	<430V	≥1.3*PUMP POWER
4DPC13-49-150-1100-A/D 4DPC13-49-150-1100-HV	85V-280V /	80V-430V	1100W	13m³/h	49m	2"	2m	<430V	≥1.3*PUMP POWER
4DPC13-54-150-1300-A/D 4DPC13-54-150-1300-HV	85V-280V /	80V-420V	1300W	13m³/h	54m	2"	2m	<430V	≥1.3*PUMP POWER
4DPC13-60-200-1500-A/D 4DPC13-60-200-1500-HV	85V-280V /	80V-430V	1500W	13m³/h	60m	2"	2m	<430V	≥1.3*PUMP POWER
4DPC17-48-200-1500-A/D 4DPC17-48-200-1500-HV	85V-280V /	80V-430V	1500W	17m³/h	48m	2"	2m	<430V	≥1.3*PUMP POWER

PERFORMANCE CURVES

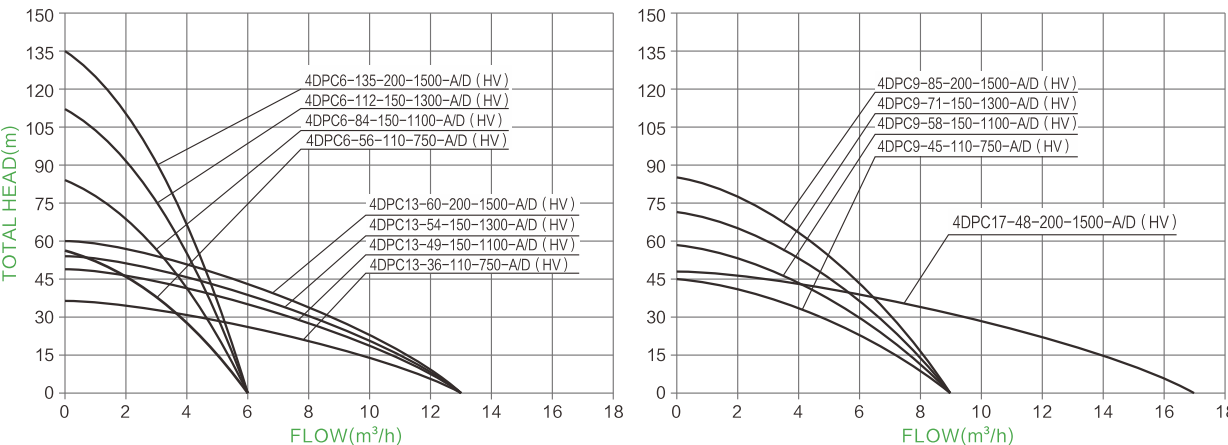

FREE SPARE PARTS



4DLR-A/D
4DLR-HV

4" AC/DC & WIDE VOLTAGE BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER



Two designs for selection




AC/DC auto-switching controller (≤2.2KW)

Wide Voltage HV Controller

TECHNICAL DATA

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DLR4.5-85-110-750-A/D 4DLR4.5-85-110-750-HV	85V-280V /	80V-430V	750W	4.5m³/h	85m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DLR7.5-65-110-750-A/D 4DLR7.5-65-110-750-HV	85V-280V /	80V-430V	750W	7.5m³/h	65m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR7.5-100-150-1100-A/D 4DLR7.5-100-150-1100-HV	85V-280V /	80V-430V	1100W	7.5m³/h	100m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR7.5-110-200-1500-A/D 4DLR7.5-110-200-1500-HV	85V-280V /	80V-430V	1500W	7.5m³/h	110m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR12-75-150-1100-A/D 4DLR12-75-150-1100-HV	85V-280V /	80V-430V	1100W	12m³/h	75m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR11.5-100-200-1500-A/D 4DLR11.5-100-200-1500-HV	85V-280V /	80V-430V	1500W	11.5m³/h	100m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR14.5-45-110-750-A/D 4DLR14.5-45-110-750-HV	85V-280V /	80V-430V	750W	14.5m³/h	45m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR15-55-150-1100-A/D 4DLR15-55-150-1100-HV	85V-280V /	80V-430V	1100W	15m³/h	55m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR15.5-70-200-1500-A/D 4DLR15.5-70-200-1500-HV	85V-280V /	80V-430V	1500W	15.5m³/h	70m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR17-95-300-2200-A/D 4DLR17-95-300-2200-HV	85V-280V /	80V-430V	2200W	17m³/h	95m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR20-45-200-1500-A/D 4DLR20-45-200-1500-HV	85V-280V /	80V-430V	1500W	20m³/h	45m	2"	2m	<430V	≥1.3*PUMP POWER
4DLR22-70-300-2200-A/D 4DLR22-70-300-2200-HV	85V-280V /	80V-430V	2200W	22m³/h	70m	2"	2m	<430V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

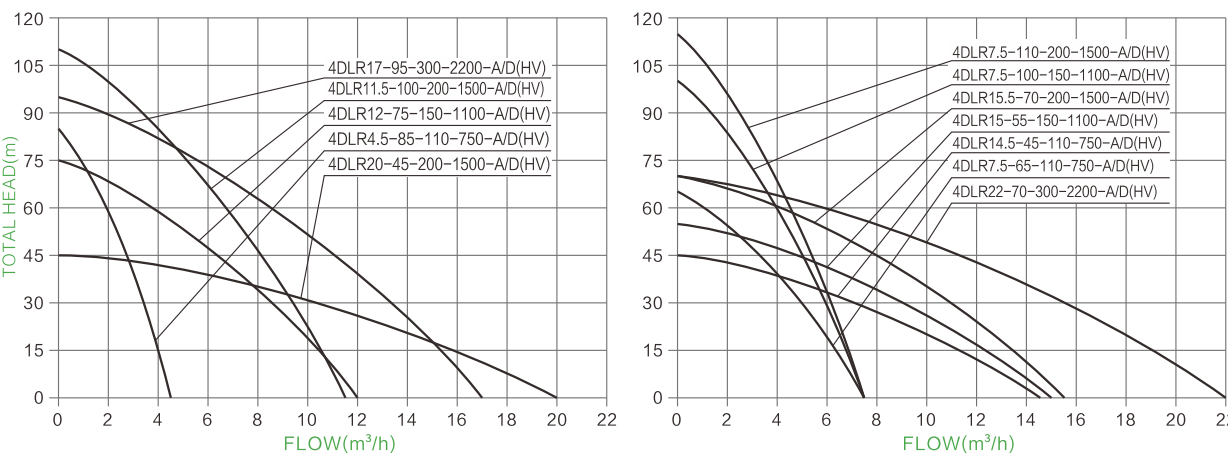

FREE SPARE PARTS



4DPC-A/D
4DPC-HV


4" AC/DC & WIDE VOLTAGE BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER



TECHNICAL DATA

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DPC6-175-300-2200-A/D 4DPC6-175-300-2200-HV	85V-280V /	80V-430V	2200W	6m³/h	175m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DPC9.5-125-300-2200-A/D 4DPC9.5-125-300-2200-HV	85V-280V /	80V-430V	2200W	9.5m³/h	125m	2"	2m	<430V	≥1.3*PUMP POWER
4DPC13-110-300-2200-A/D 4DPC13-110-300-2200-HV	85V-280V /	80V-430V	2200W	13m³/h	110m	2"	2m	<430V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

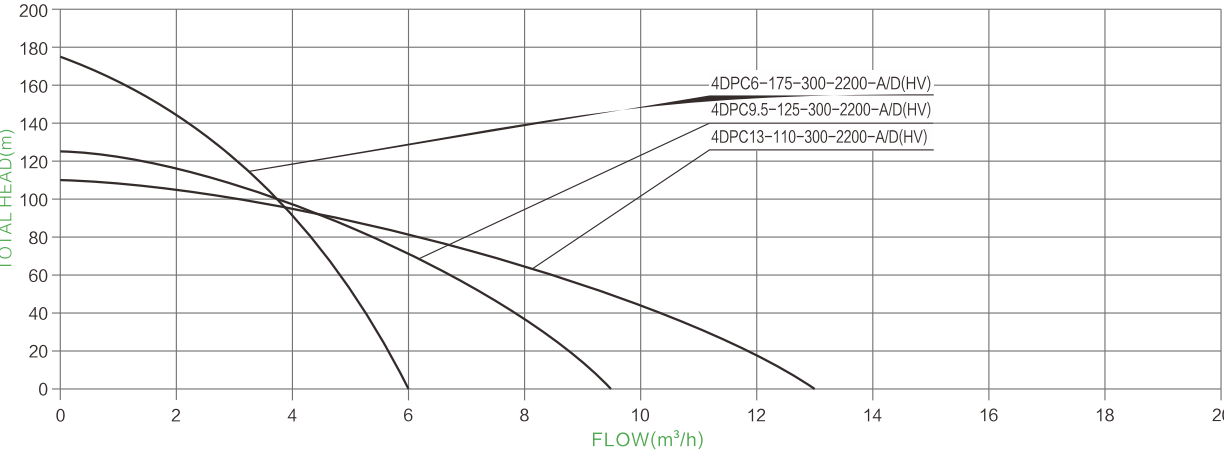


FREE SPARE PARTS



4DSC-A/D
4DSC-HV


4" AC/DC & WIDE VOLTAGE BRUSHLESS SOLAR PUMP WITH S/S IMPELLER

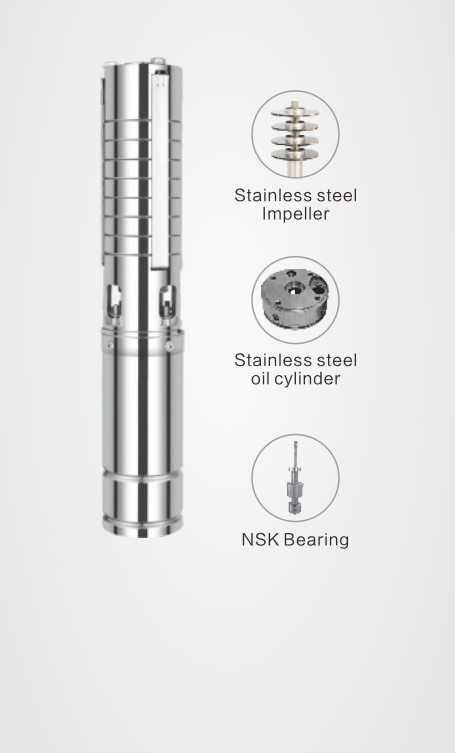

TECHNICAL DATA

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DSC5.2-67-110-750-A/D 4DSC5.2-67-110-750-HV	85V-280V /	80V-430V	750W	5.2m³/h	67m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DSC4.8-203-200-1500-A/D 4DSC4.8-203-200-1500-HV	85V-280V /	80V-430V	1500W	4.8m³/h	203m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DSC5.2-101-150-1100-A/D 4DSC5.2-101-150-1100-HV	85V-280V /	80V-430V	1100W	5.2m³/h	101m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DSC5.2-146-200-1300-A/D 4DSC5.2-146-200-1300-HV	85V-280V /	80V-430V	1300W	5.2m³/h	146m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DSC7.5-80-150-1300-A/D 4DSC7.5-80-150-1300-HV	85V-280V /	80V-430V	1300W	7.5m³/h	80m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DSC7.5-100-200-1500-A/D 4DSC7.5-100-200-1500-HV	85V-280V /	80V-430V	1500W	7.5m³/h	100m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DSC11-60-200-1500-A/D 4DSC11-60-200-1500-HV	85V-280V /	80V-430V	1500W	11m³/h	60m	2"	2m	<430V	≥1.3*PUMP POWER
4DSC19-35-200-1500-A/D 4DSC19-35-200-1500-HV	85V-280V /	80V-430V	1500W	19m³/h	35m	2"	2m	<430V	≥1.3*PUMP POWER
4DSC25-26-200-1500-A/D 4DSC25-26-200-1500-HV	85V-280V /	80V-430V	1500W	25m³/h	26m	2"	2m	<430V	≥1.3*PUMP POWER
4/6DSC30-19-150-1100-A/D 4/6DSC30-19-150-1100-HV	85V-280V /	80V-430V	1100W	30m³/h	19m	3"	2m	<430V	≥1.3*PUMP POWER
4/6DSC36-22-200-1500-A/D 4/6DSC36-22-200-1500-HV	85V-280V /	80V-430V	1500W	36m³/h	22m	3"	2m	<430V	≥1.3*PUMP POWER
4/6DSC30-31-200-1500-A/D 4/6DSC30-31-200-1500-HV	85V-280V /	80V-430V	1500W	30m³/h	31m	3"	2m	<430V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

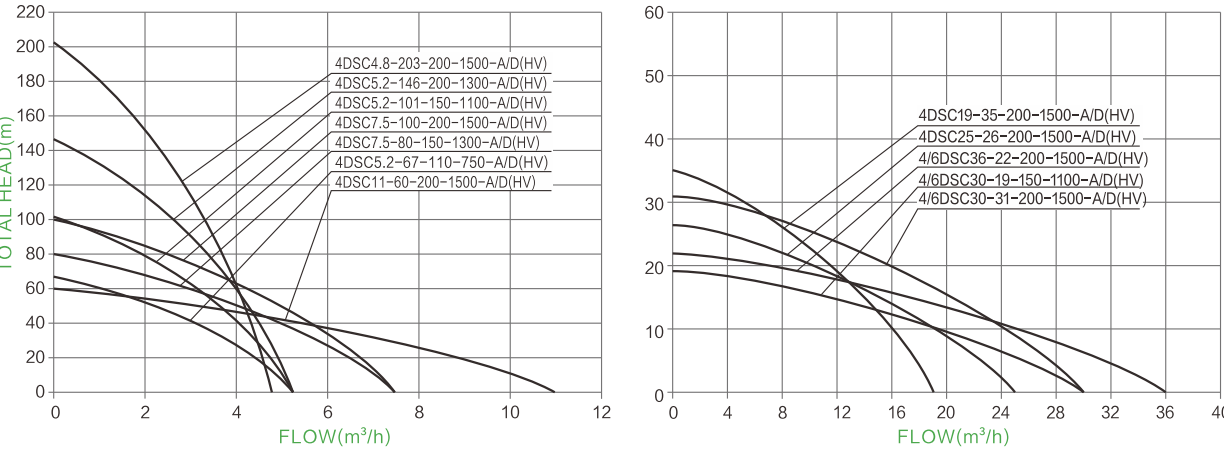

FREE SPARE PARTS



4DSC-A/D
4DSC-HV

4" AC/DC & WIDE VOLTAGE BRUSHLESS SOLAR PUMP WITH S/S IMPELLER



Stainless steel Impeller



Stainless steel oil cylinder



NSK Bearing



AC/DC auto-switching controller (≤2.2KW)




Wide Voltage HV Controller

TECHNICAL DATA

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DSC5.2-255-300-2200-A/D	85V-280V	80V-430V	2200W	5.2m³/h	255m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DSC5.2-255-300-2200-HV	/								
4DSC7.5-150-300-2200-A/D	85V-280V	80V-430V	2200W	7.5m³/h	150m	1.25"	2m	<430V	≥1.3*PUMP POWER
4DSC7.5-150-300-2200-HV	/								
4DSC11-120-300-2200-A/D	85V-280V	80V-430V	2200W	11m³/h	120m	2"	2m	<430V	≥1.3*PUMP POWER
4DSC11-120-300-2200-HV	/								
4DSC19-60-300-2200-A/D	85V-280V	80V-430V	2200W	19m³/h	60m	2"	2m	<430V	≥1.3*PUMP POWER
4DSC19-60-300-2200-HV	/								
4DSC30-36-300-2200-A/D	85V-280V	80V-430V	2200W	30m³/h	36m	2"	2m	<430V	≥1.3*PUMP POWER
4DSC30-36-300-2200-HV	/								
4/6DSC36-38-300-2200-A/D	85V-280V	80V-430V	2200W	36m³/h	38m	3"	2m	<430V	≥1.3*PUMP POWER
4/6DSC36-38-300-2200-HV	/								

HYDRAULIC PERFORMANCE CURVES

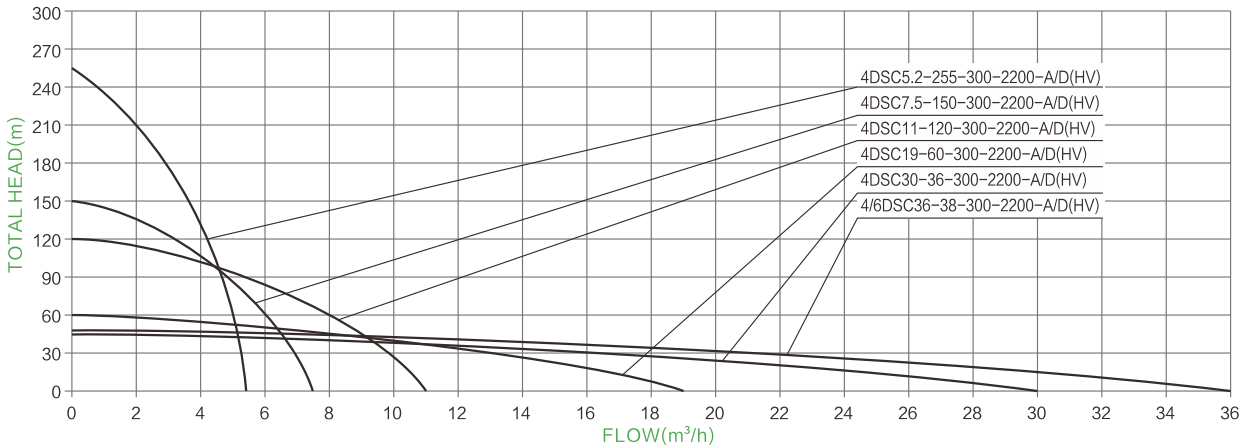

FREE SPARE PARTS



4DPC-A/D
(3KW-7.5KW)

4" AC/DC BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER



Stainless steel outlet




Stainless steel connecting fitting



Stainless steel oil cylinder



Copper outlet



Copper connecting fitting



Copper oil cylinder



Plastic Impeller



NSK Bearing



AC/DC auto-switching controller (5.5KW-22KW)




AC/DC auto-switching controller (3KW-4KW)

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DPC6-230-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	6m³/h	230m	1.25"	2m	<780V	≥1.3*PUMP POWER
4DPC6-300-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	6m³/h	300m	1.25"	2m	<780V	≥1.3*PUMP POWER
4DPC9.5-195-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	9.5m³/h	195m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC9.5-250-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	9.5m³/h	250m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC9.5-325-380/550-5500-A/D	AC380/DC550V	520V-650V	5500W	9.5m³/h	325m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC13-150-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	13m³/h	150m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC13-190-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	13m³/h	190m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC13-240-380/550-5500-A/D	AC380/DC550V	520V-650V	5500W	13m³/h	240m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC13-270-380/550-7500-A/D	AC380/DC550V	520V-650V	7500W	13m³/h	270m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC17-110-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	17m³/h	110m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC17-140-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	17m³/h	140m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC17-175-380/550-5500-A/D	AC380/DC550V	520V-650V	5500W	17m³/h	175m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC17-220-380/550-7500-A/D	AC380/DC550V	520V-650V	7500W	17m³/h	220m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC22-98-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	22m³/h	98m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC22-135-380/550-5500-A/D	AC380/DC550V	520V-650V	5500W	22m³/h	135m	2"	2m	<780V	≥1.3*PUMP POWER
4DPC22-170-380/550-7500-A/D	AC380/DC550V	520V-650V	7500W	22m³/h	170m	2"	2m	<780V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

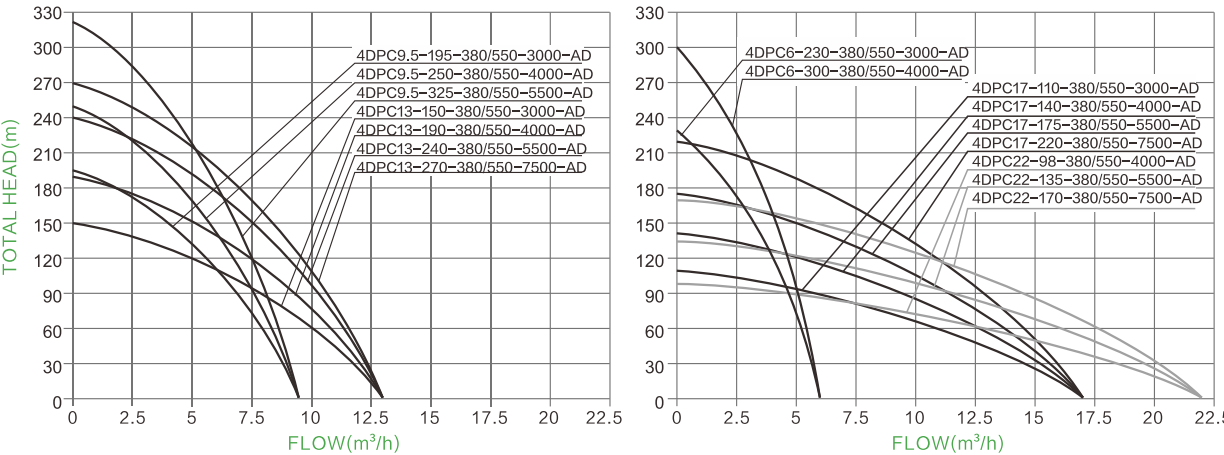

FREE SPARE PARTS



4DSC-A/D

4"AC/DC BRUSHLESS SOLAR PUMP WITH S/S IMPELLER



Stainless steel
Impeller



Stainless steel
oil cylinder



NSK Bearing



AC/DC auto-
switching controller
(5.5KW-22KW)




AC/DC auto-
switching controller
(3KW-4KW)

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4DSC5.2-300-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	5.2m³/h	300m	1.25"	2m	<780V	≥1.3*PUMP POWER
4DSC7.5-210-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	7.5m³/h	210m	1.25"	2m	<780V	≥1.3*PUMP POWER
4DSC8-272-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	8m³/h	272m	1.25"	2m	<780V	≥1.3*PUMP POWER
4DSC11-157-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	11m³/h	157m	2"	2m	<780V	≥1.3*PUMP POWER
4DSC11-200-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	11m³/h	200m	2"	2m	<780V	≥1.3*PUMP POWER
4DSC19-98-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	19m³/h	98m	2"	2m	<780V	≥1.3*PUMP POWER
4DSC19-135-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	19m³/h	135m	2"	2m	<780V	≥1.3*PUMP POWER
4DSC19-170-380/550-5500-A/D	AC380/DC550V	520V-650V	5500W	19m³/h	170m	2"	2m	<780V	≥1.3*PUMP POWER
4DSC30-52-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	30m³/h	52m	2"	2m	<780V	≥1.3*PUMP POWER
4DSC30-74-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	30m³/h	74m	2"	2m	<780V	≥1.3*PUMP POWER
4DSC30-96-380/550-5500-A/D	AC380/DC550V	520V-650V	5500W	30m³/h	96m	2"	2m	<780V	≥1.3*PUMP POWER
4DSC30-155-380/550-7500-A/D	AC380/DC550V	520V-650V	7500W	30m³/h	155m	2"	2m	<780V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

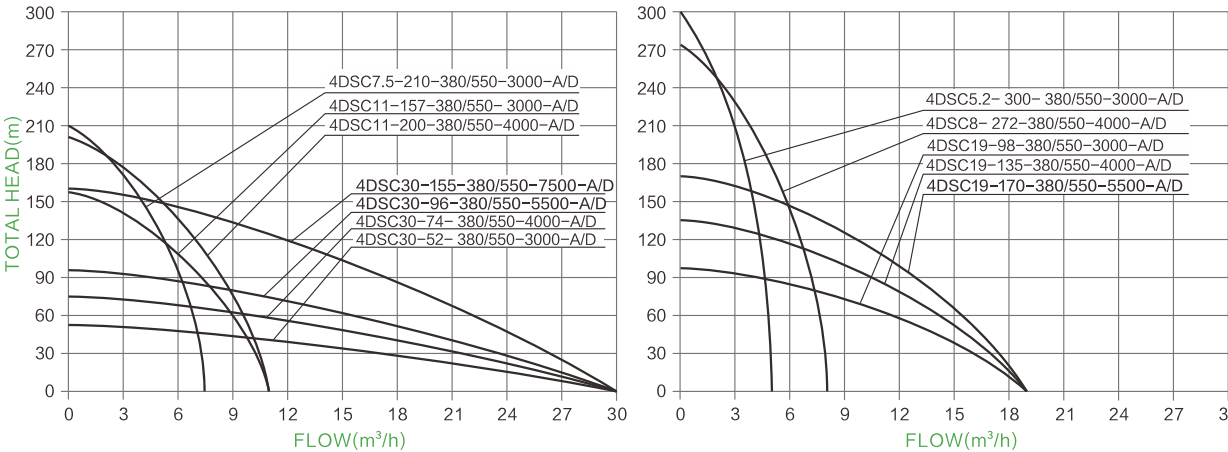

FREE SPARE PARTS



4/6DSC-A/D

6"AC/DC BRUSHLESS SOLAR PUMP WITH S/S IMPELLER



Stainless steel
Impeller



Stainless steel
oil cylinder



NSK Bearing



AC/DC auto-
switching controller
(5.5KW-22KW)




AC/DC auto-
switching controller
(3KW-4KW)

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
4/6DSC36-56-380/550-3000-A/D	AC380/DC550V	520V-650V	3000W	36m³/h	56m	3"	2m	<780V	≥1.3*PUMP POWER
4/6DSC36- 75-380/550-4000-A/D	AC380/DC550V	520V-650V	4000W	36m³/h	75m	3"	2m	<780V	≥1.3*PUMP POWER
4/6DSC36-98-380/550-5500-A/D	AC380/DC550V	520V-650V	5500W	36m³/h	98m	3"	2m	<780V	≥1.3*PUMP POWER
4/6DSC36-135-380/550-7500-A/D	AC380/DC550V	520V-650V	7500W	36m³/h	135m	3"	2m	<780V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

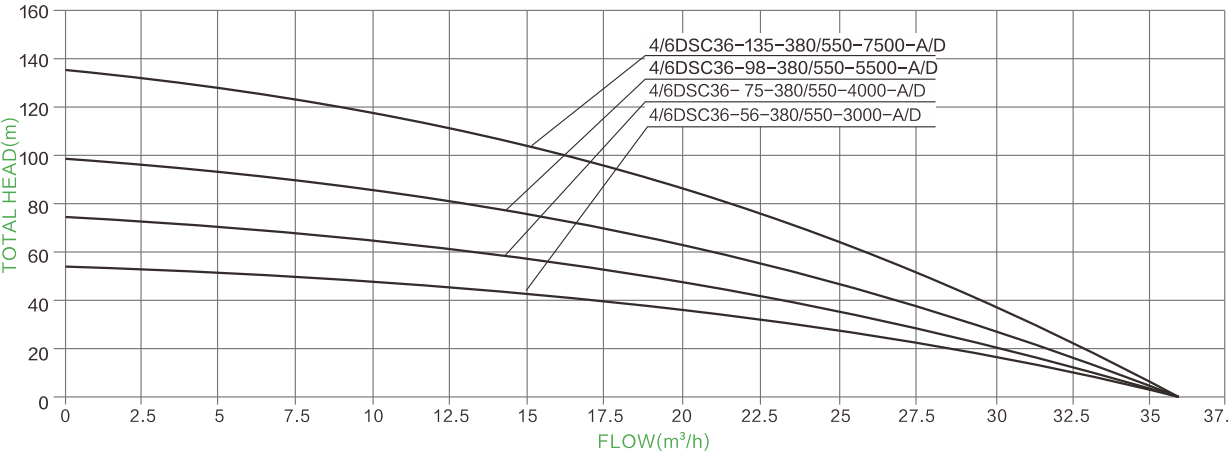

FREE SPARE PARTS



6DSC-A/D
6" AC/DC BRUSHLESS SOLAR PUMP WITH
S/S IMPELLER



Stainless steel
Impeller



Stainless steel
oil cylinder



NSK Bearing




AC/DC auto-
switching controller
(5.5KW-22KW)

TECHNICAL DATA

Table with 10 columns: ITEM, Voltage, Optimum input voltage (DC), Power, Max. Flow, Max. Head, Outlet, Cable, Open circuit voltage (VOC), and Power. It lists 24 different pump models and their specifications.

HYDRAULIC PERFORMANCE CURVES


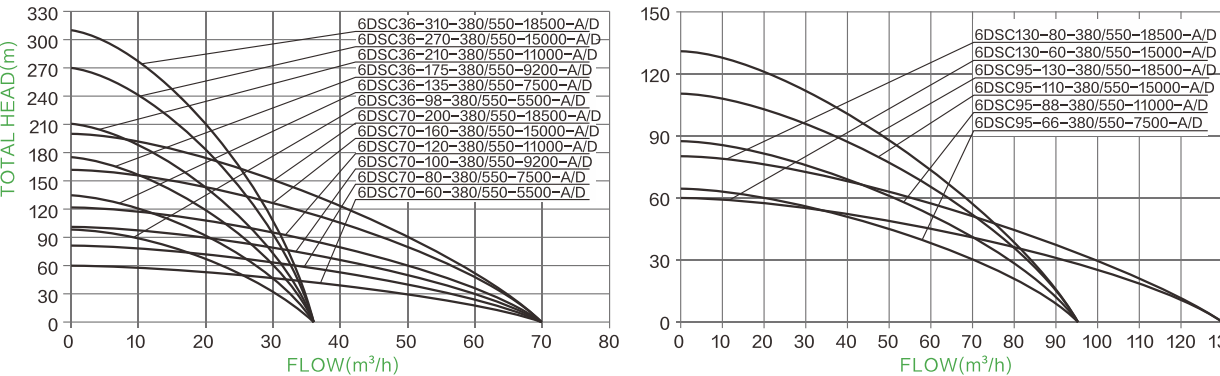


FREE SPARE PARTS



SOLAR
SURFACE PUMP

Environmental protection
and energy saving

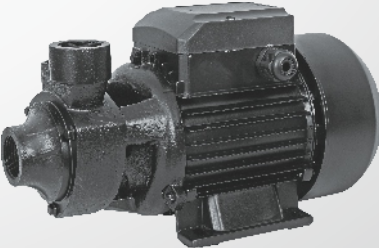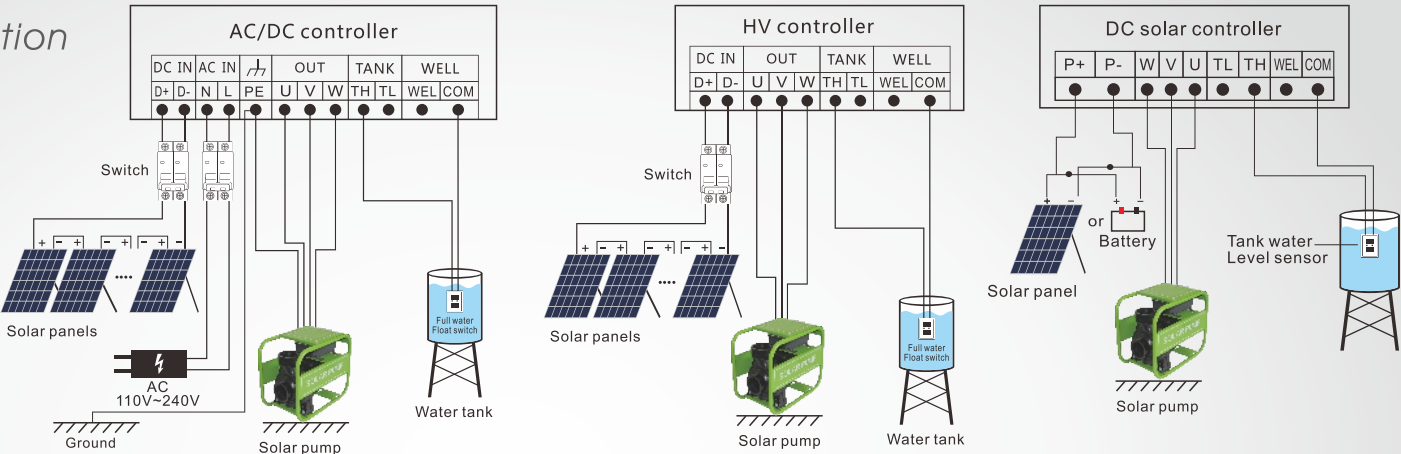

DCPM / DCPM-A/D
DCPM-HV

DC & AC/DC & WIDE VOLTAGE BRUSHLESS
CENTRIFUGAL SOLAR PUMP



DC controller



AC/DC auto-switching controller
(≤2.2KW)





Wide Voltage HV
Controller

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DCPM6-24-48-550	48V	60V -90V	550W	6m³/h	24m	1"	0.6m	<105V	≥ 1.3*PUMP POWER
DCPM15-14-48-550	48V	60V -90V	550W	15m³/h	14m	1.5"	0.6m	<105V	≥ 1.3*PUMP POWER
DCPM21-14-72-750	72V	90V-120V	750W	21m³/h	14m	2"	0.6m	<160V	≥ 1.3*PUMP POWER
DCPM26-15- 72-1100	72V	90V-120V	1100W	26m³/h	15m	2"	0.6m	<160V	≥ 1.3*PUMP POWER
DCPM50-17-110-1500	110V	110V-150V	1500W	50m³/h	17m	3"	0.6m	<210V	≥ 1.3*PUMP POWER

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DCPM21-14-72-750-A/D	85V-280V	80V-430V	750W	21m³/h	14m	2"	0.6m	<430V	≥ 1.3*PUMP POWER
DCPM26-15-72-1100-A/D	85V-280V	80V-430V	1100W	26m³/h	15m	2"	0.6m	<430V	≥ 1.3*PUMP POWER
DCPM50-17-110-1500-A/D DCPM50-17-110-1500-HV	85V-280V /	80V-430V	1500W	50m³/h	17m	3"	0.6m	<430V	≥ 1.3*PUMP POWER
DCPM60-20-300-2200-A/D DCPM60-20-300-2200-HV	85V-280V /	80V-430V	2200W	60m³/h	20m	4"	0.6m	<430V	≥ 1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

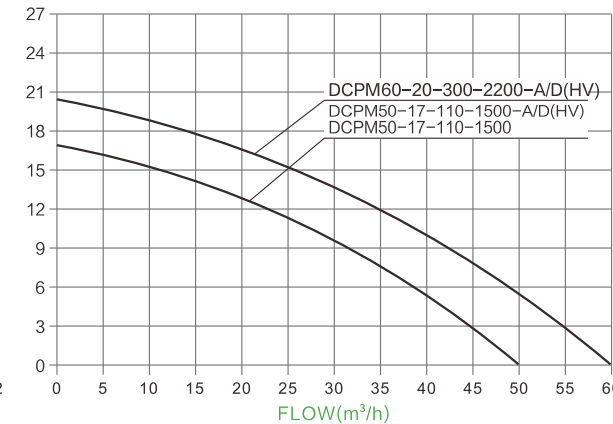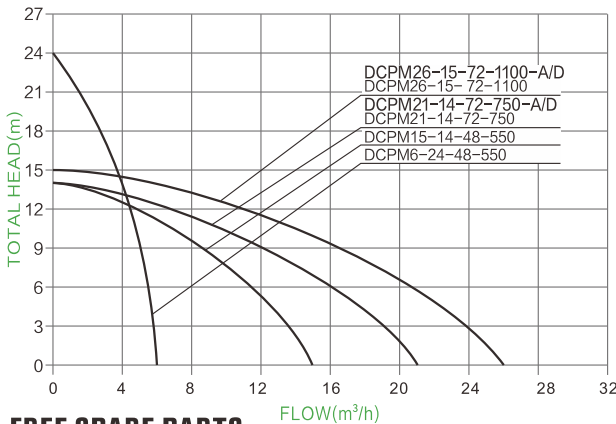

FREE SPARE PARTS



DQB/DQB-A/D
DZB/DZB-A/D

DC AND AC/DC BRUSHLESS SURFACE
SOLAR PUMP



DQB



DZB



DC controller



AC/DC auto-switching controller
(≤2.2KW)

TECHNICAL DATA



ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DQB2-25-24-210	24V	30V-48V	210W	2m³/h	25m	1×1"	2m	<55V	≥ 1.3*PUMP POWER
DQB2-30-24-280	24V	30V-48V	280W	2m³/h	30m	1×1"	2m	<55V	≥ 1.3*PUMP POWER
DQB3-50-48-550	48V	60V-90V	550W	3m³/h	50m	1×1"	2m	<105V	≥ 1.3*PUMP POWER
DQB3-65-72-750	72V	90V-120V	750W	3m³/h	65m	1×1"	2m	<160V	≥ 1.3*PUMP POWER

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DQB3-65-72-750-A/D	85V-280V	80V-430V	750W	3m³/h	65m	1×1"	2m	<430V	≥ 1.3*PUMP POWER

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DZB2-25-24-210	24V	30V-48V	210W	2m³/h	25m	1×1"	2m	<55V	≥ 1.3*PUMP POWER
DZB2-30-24-280	24V	30V-48V	280W	2m³/h	30m	1×1"	2m	<55V	≥ 1.3*PUMP POWER
DZB3-50-48-550	48V	60V-90V	550W	3m³/h	50m	1×1"	2m	<105V	≥ 1.3*PUMP POWER
DZB3-65-72-750	72V	90V-120V	750W	3m³/h	65m	1×1"	2m	<160V	≥ 1.3*PUMP POWER

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DZB3-65-72-750-A/D	85V-280V	80V-430V	750W	3m³/h	65m	1"x1"	2m	<430V	≥ 1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

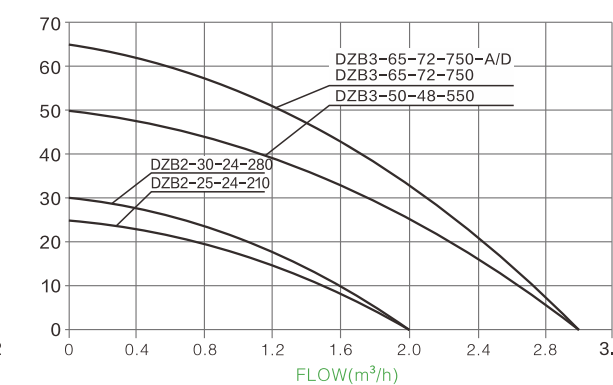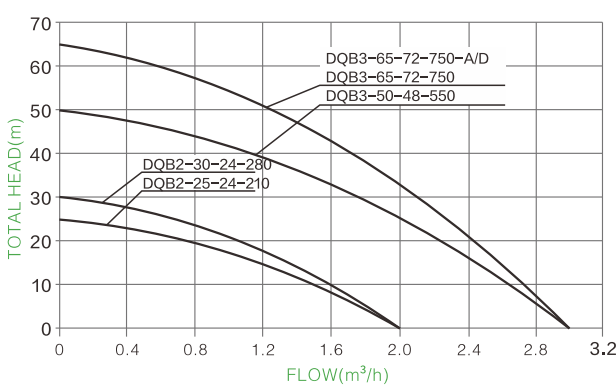


FREE SPARE PARTS



DJET/DJET-AD

DC AND AC/DC BRUSHLESS SURFACE SOLAR PUMP

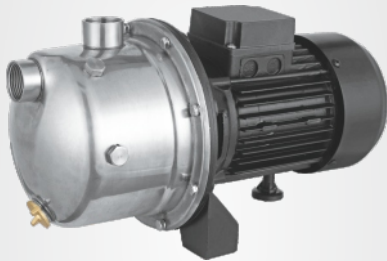

DJET




DC controller AC/DC auto-switching controller (≤2.2KW)

TECHNICAL DATA

ITEM	Voltage	Best DC Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								open voltage	Power
DJET2.5-35-48-370	48V	60V-90V	370W	2.5m³/h	35m	1"x1"	2m	<105V	≥1.3*PUMP POWER
DJET2.7-45-48-550	48V	60V-90V	550W	2.5m³/h	45m	1"x1"	2m	<105V	≥1.3*PUMP POWER
DJET3-55-72-750	72V	90V-120V	750W	3m³/h	55m	1"x1"	2m	<160V	≥1.3*PUMP POWER

ITEM	AC Voltage	DC Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								open voltage	Power
DJET3-55-72-750-A/D	85V-280V	80V-430V	750W	3m³/h	55m	1"x1"	2m	<430V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

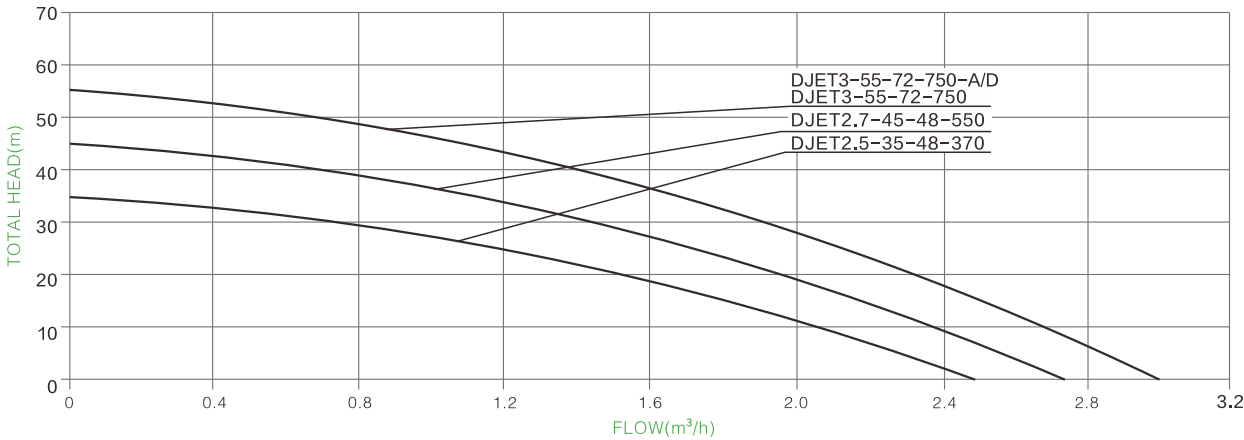

FREE SPARE PARTS



DLP/DLP-A/D

DC&AC/DC BRUSHLESS SWIMMING POOL SOLAR PUMP




DC controller AC/DC auto-switching controller (≤2.2KW)

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DLP15-14-48-500	48V	60V-90V	500W	15m³/h	14m	2X2"	2m	<105V	≥1.3*PUMP POWER
DLP20-19-72-900	72V	90V-120V	900W	20m³/h	19m	2X2"	2m	<160V	≥1.3*PUMP POWER
DLP27-19-72-1200	72V	90V-120V	1200W	27m³/h	19m	3X3"	2m	<160V	≥1.3*PUMP POWER
DLP27-19-110-1200	110V	110V-150V	1200W	27m³/h	19m	3X3"	2m	<210V	≥1.3*PUMP POWER

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DLP20-19-72-900-A/D	85V-280V	80V-430V	900W	20m³/h	19m	2X2"	2m	<430V	≥1.3*PUMP POWER
DLP27-19-72-1200-A/D	85V-280V	80V-430V	1200W	27m³/h	19m	3X3"	2m	<430V	≥1.3*PUMP POWER

PERFORMANCE CURVES

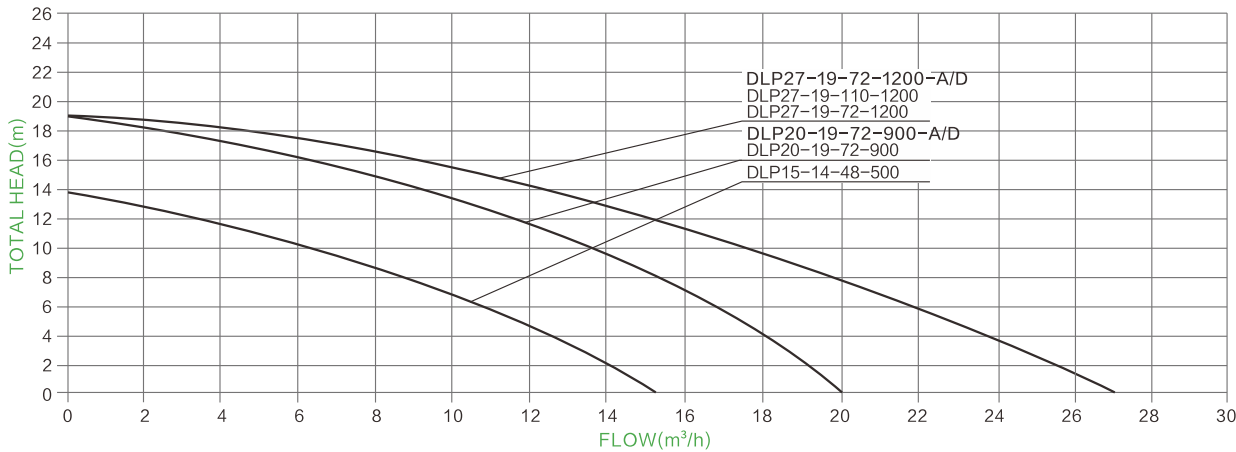

FREE SPARE PARTS



DQDX/DODX-A/D

DC AND AC/DC SUBMERSIBLE SOLAR PUMP



DC controller
AC/DC auto-switching controller (≤2.2KW)

TECHNICAL DATA


ITEM	Voltage	Best DC Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								open voltage	Power
DQD5.5-14-24-300	24V	30V-48V	300W	5.5m³/h	14m	1"	5m	<55V	≥1.3*PUMP POWER
DQD7-18-48-550	48V	60V-90V	550W	7m³/h	18m	1"	5m	<105V	≥1.3*PUMP POWER
DQD7-26-72-750	72V	90V-120V	750W	7m³/h	26m	1"	5m	<160V	≥1.3*PUMP POWER
DQD17-27-72-750	72V	90V-120V	750W	17m³/h	27m	2"	5m	<160V	≥1.3*PUMP POWER
DQD20-30-110-1100	110V	110V-150V	1100W	20m³/h	30m	2"	5m	<210V	≥1.3*PUMP POWER
DQD45-19-110-1500	110V	110V-150V	1500W	45m³/h	19m	3"	5m	<210V	≥1.3*PUMP POWER

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DQD7-26-110-750-A/D	85V-280V	80V-430V	750W	7m³/h	26m	1"	5m	<430V	≥1.3*PUMP POWER
DQD17-27-110-750-A/D	85V-280V	80V-430V	750W	17m³/h	27m	2"	5m	<430V	≥1.3*PUMP POWER
DQD20-30-150-1100-A/D	85V-280V	80V-430V	1100W	20m³/h	30m	2"	5m	<430V	≥1.3*PUMP POWER
DQD45-19-150-1500-A/D	85V-280V	80V-430V	1500W	45m³/h	19m	3"	5m	<430V	≥1.3*PUMP POWER

ITEM	Voltage	Best DC Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								open voltage	Power
DWQD30-9-72-750	72V	90V-120V	750W	30m³/h	9m	3"	5m	<160V	≥1.3*PUMP POWER
DWQD40-10-110-1100	110V	110V-150V	1100W	40m³/h	10m	3"	5m	<210V	≥1.3*PUMP POWER
DWQD50-10-110-1500	110v	110V-150V	1500W	50m³/h	10m	3"	5m	<210V	≥1.3*PUMP POWER

ITEM	(AC) Voltage	(DC) Voltage	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
DWQD30-9-110-750-A/D	85V-280V	80V-430V	750W	30m³/h	9m	3"	5m	<430V	≥1.3*PUMP POWER
DWQD40-10-110-1100-A/D	85V-280V	80V-430V	1100W	40m³/h	10m	3"	5m	<430V	≥1.3*PUMP POWER
DWQD50-10-110-1500-A/D	85V-280V	80V-430V	1500W	50m³/h	10m	3"	5m	<430V	≥1.3*PUMP POWER

PERFORMANCE CURVES

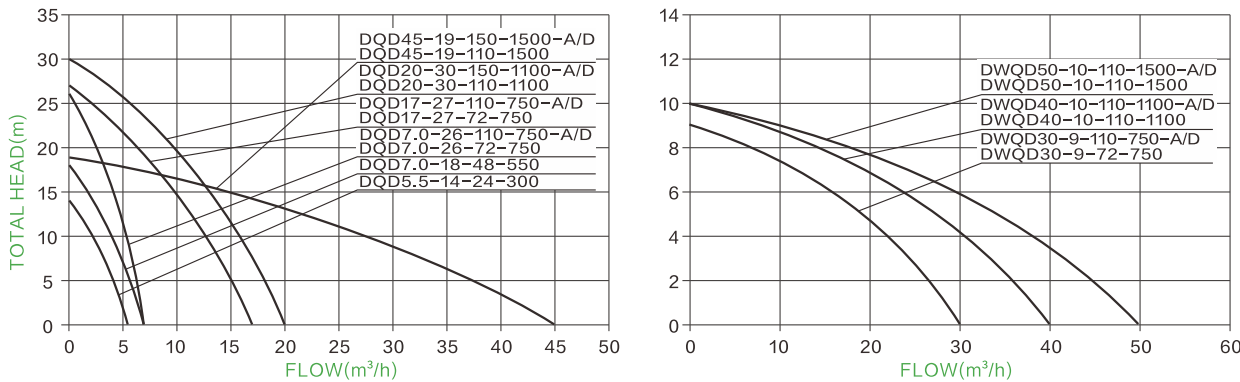

FREE SPARE PARTS



SOLAR AERATOR

BRUSHLESS SOLAR PUMP



Solar Aerator



Solar air oxygenator



DC controller
AC/DC auto-switching controller (≤2.2KW)



Solar Paddle Wheel Aerator



Solar Impeller Aerator

SOLAR AERATOR

ITEM	Voltage	Best input voltage(DC)	Power	Max. Flow	Max. Head	Outlet	Solar panel	
							Open circuit voltage(VOC)	Power
DSA15-4.5-48-370	48V	60V-90V	370W	15m³/h	4.5m	3"	<105V	≥1.3*PUMP POWER
DSA25-5-48-750	48V	60V-90V	750W	25m³/h	5m	3"	<105V	≥1.3*PUMP POWER
DSA30-7-72-1100	72V	90V-120V	1100W	30m³/h	7m	3"	<160V	≥1.3*PUMP POWER
DSA40-6-110-1500	110V	110V-150V	1500W	40m³/h	6m	3"	<210V	≥1.3*PUMP POWER
DSA55-5-300-2200-A/D	AC220/DC300V	300V-400V	2200W	55m³/h	5m	4"	<430V	≥1.3*PUMP POWER

SOLAR AIR OXYGENATOR

ITEM	Voltage	Best input voltage(DC)	Power	Oxygenation rate(kg/h)	Covering Area(m²)	Impeller quantity	Solar panel	
							Open circuit voltage(VOC)	Power
DSAO-48-750	48V	60V-90V	750W	≥1.1	666-2000		<105V	≥1.3*PUMP POWER
DSAO-110-1500	110V	110V-150V	1500W	≥2.3	2000-4000		<210V	≥1.3*PUMP POWER
DSAO-300-2200	AC220/DC300V	300V-400V	2200W	≥3.4	2665-5328		<430V	≥1.3*PUMP POWER

SOLAR PADDLE WHEEL AERATOR

ITEM	Voltage	Best input voltage(DC)	Power	Oxygenation rate(kg/h)	Covering Area(m²)	Impeller quantity	Solar panel	
							Open circuit voltage(VOC)	Power
DSWA2-48-750	48V	60V-90V	750W	>1.1	666-3330	2	<105V	≥1.3*PUMP POWER
DSWA4-110-1500	110V	110V-150V	1500W	>1.9	2000-6660	4	<210V	≥1.3*PUMP POWER
DSWA6-300-2200-A/D	AC220/DC300V	300V-400V	2200W	>2.0	2665-8000	6	<430V	≥1.3*PUMP POWER

SOLAR IMPELLER AERATOR

ITEM	Voltage	Best input voltage (DC)	Power	Oxygenation rate(kg/h)	Covering Area(m²)		Solar panel	
							Open circuit voltage(VOC)	Power
DSIA-48-750	48V	60V-90V	750W	≥1.1	666-2000		<105V	≥1.3*PUMP POWER
DSIA-72-1100	72V	90V-120V	1100W	≥1.6	2000-2665		<160V	≥1.3*PUMP POWER
DSIA-110-1500	110V	110V-150V	1500W	≥2.3	2000-4000		<210V	≥1.3*PUMP POWER
DSIA-300-2200-A/D	AC220/DC300V	300V-400V	2200W	≥3.4	2665-5328		<430V	≥1.3*PUMP POWER

Solar panel recommendation for 12V-110V DC solar pump

PUMP POWER 80W-12V Voc: 18V~55V (1) (2) (3) Solar panel:150W*1PCS Solar panel:270W*1PCS Solar panel:330W*1PCS	(1) (2) (3) Solar panel:150W*2PCS Solar panel:270W*1PCS Solar panel:330W*1PCS
PUMP POWER 120W-24V 180W-24V 200W-24V 210W-24V 210W-36V Voc: 18V~55V (1) (2) (3) Solar panel:150W*2PCS Solar panel:270W*1PCS Solar panel:330W*1PCS	(1) (2) (3) Solar panel:270W*2PCS Solar panel:330W*1PCS
PUMP POWER 280W-24V 300W-24V Voc: 18V~55V (1) (2) Solar panel:270W*2PCS Solar panel:330W*1PCS	(1) (2) Solar panel:270W*2PCS Solar panel:330W*2PCS
PUMP POWER 370W-48V 400W-48V Voc: 30V~105V (1) (2) Solar panel:270W*2PCS Solar panel:330W*2PCS	(1) (2) Solar panel:270W*4PCS Solar panel:330W*2PCS
PUMP POWER 500W-48V 550W-48V Voc: 30V~105V (1) (2) Solar panel:270W*4PCS Solar panel:330W*4PCS	(1) (2) Solar panel:270W*3PCS Solar panel:330W*3PCS

Solar panel recommendation for 220V-380V AC/DC & HV solar pump

PUMP POWER 750W-220V AC Vol. 85V~280V DC Vol. 80V~430V (1) (2) Solar panel:270W*4PCS Solar panel:330W*4PCS	(1) (2) Solar panel:270W*3~7PCS Solar panel:330W*4~6PCS
PUMP POWER 1100W-220V 1200W-220V AC Vol. 85V~280V DC Vol. 80V~430V (1) (2) Solar panel:270W*6PCS Solar panel:330W*6PCS	(1) (2) Solar panel:270W*8~9PCS Solar panel:330W*6~8PCS
PUMP POWER 1300W-220V 1500W-220V AC Vol. 85V~280V DC Vol. 80V~430V (1) (2) Solar panel:270W*4PCS Solar panel:330W*3PCS	(1) (2) Solar panel:270W*6PCS Solar panel:330W*6PCS
PUMP POWER 1100W-110V Voc: 60V~210V (1) (2) Solar panel:270W*8PCS Solar panel:330W*6PCS	(1) (2) Solar panel:270W*10PCS Solar panel:330W*8~9PCS
PUMP POWER 900W-72V Voc: 55V~160V (1) (2) Solar panel:270W*4PCS Solar panel:330W*3PCS	(1) (2) Solar panel:270W*15PCS Solar panel:330W*12PCS
PUMP POWER 750W-48V Voc: 30V~105V (1) (2) Solar panel:270W*4PCS Solar panel:330W*2PCS	(1) (2) Solar panel:270W*19PCS Solar panel:330W*15PCS
PUMP POWER 1500W-110V Voc: 60V~210V (1) (2) Solar panel:270W*8PCS Solar panel:330W*6PCS	(1) (2) Solar panel:270W*26PCS Solar panel:330W*22PCS
PUMP POWER 7500W-380V AC Vol. 380V~440V DC Vol. 480V~780V (1) (2) Solar panel:270W*36PCS Solar panel:330W*30PCS	(1) (2) Solar panel:270W*45PCS Solar panel:330W*36PCS
PUMP POWER 9200W-380V AC Vol. 380V~440V DC Vol. 480V~780V (1) (2) Solar panel:270W*54PCS Solar panel:330W*42PCS	(1) (2) Solar panel:270W*76PCS Solar panel:330W*60PCS
PUMP POWER 15000W-380V AC Vol. 380V~440V DC Vol. 480V~780V (1) (2) Solar panel:270W*8PCS Solar panel:330W*6PCS	(1) (2) Solar panel:450W*56PCS Solar panel:550W*52PCS